

POLARIS HARDEST WORKING. SMOOTHEST RIDING.



POLARIS RANGER



POLARIS SPORTSMAN



POLARIS RZR

POLARIS HARDEST WORKING. SMOOTHEST RIDING.

www.polarisindustries.com.au

[/PolarisAustralia](https://www.facebook.com/PolarisAustralia)

[/TeamRZR](https://www.facebook.com/TeamRZR)



POLARIS ACE



POLARIS GENERAL



POLARIS UTE

Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on published manufacturer specifications available at March 2017 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders and drivers. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3030. Printed March 2017.

YOUTH

POLARIS SPORTSMAN

POLARIS ACE

POLARIS RANGER

POLARIS GENERAL

POLARIS RZR

OUTLAW 50
PAGE 7



OUTLAW 110
PAGE 9



SPORTSMAN 110
PAGE 11



ACE 150
PAGE 13



RZR 170
PAGE 15



FARMHAND 450 HD
PAGE 21



SPORTSMAN 450
PAGE 23



SPORTSMAN 450 EPS
PAGE 25



SPORTSMAN 570 HD
PAGE 27



SPORTSMAN 570 EPS
PAGE 29



SPORTSMAN 570 EPS
UTILITY EDITION
PAGE 31



UTE 570 HD EPS
PAGE 33



SPORTSMAN 6X6 570 EPS
PAGE 35



SPORTSMAN 850 SP EPS
PAGE 37



SPORTSMAN XP 1000 EPS
PAGE 39



SCRAMBLER XP 1000 EPS
PAGE 41



ACE 500
PAGE 47



ACE 570 HD EPS
PAGE 49



ACE 900 XC EPS
PAGE 51



RANGER EV
PAGE 57



RANGER 500
PAGE 59



RANGER 570 HD EPS
PAGE 61



RANGER 800 6X6
PAGE 63



RANGER XP 900 EPS
PAGE 65



RANGER XP 1000 EPS
PAGE 67



RANGER XP 1000 EPS - HUNTER EDITION
PAGE 69



RANGER DIESEL 1000 HD EPS
PAGE 71



RANGER CREW 570 EPS
PAGE 73



RANGER CREW XP 1000 EPS
PAGE 75



RANGER CREW DIESEL
PAGE 77



GENERAL 1000 EPS - PREMIUM
PAGE 83



GENERAL 1000 EPS - DELUXE
PAGE 85



GENERAL 4 1000 EPS
PAGE 87



RZR S 570 EPS
PAGE 93



RZR S 900 EPS
PAGE 95



RZR XP TURBO EPS
PAGE 97



RZR XP 4 TURBO EPS
PAGE 99





RZR 170



OUTLAW



SPORTSMAN

*Overseas models shown with optional accessories



POLARIS ACE 150

POLARIS YOUTH

50

OUTLAW 50



110

OUTLAW 110



SPORTSMAN 110



150 - 170

ACE 150



RZR 170



FREE SAFETY GEAR


All Polaris Youth Models come standard with the following safety items.



Safety Orange Whip Flag



1 x Approved Youth Helmet - Outlaw/ACE/Sportsman Models. 2 x Approved Youth Helmet - RZR 170 (Goggles Not Included)



Polaris Rider-Training Instructional DVD

» POLARIS YOUTH

Polaris leads the way in youth models and in promoting rider safety. Loaded with innovative features including speed limiters, choose a model sized right for your kids aged 6-years or older.



**SAFETY
PACKED FUN ON
FOUR WHEELS.**

*Overseas model shown with optional accessories

OUTLAW 50



ENGINE & DRIVETRAIN

Displacement / Engine Type	49 cc / 4-Stroke Single Cylinder
Drive System	2WD
Horsepower / Torque	3.4 hp @ 7500 RPM / 2.9 Nm @ 6000 RPM

SUSPENSION

Front Suspension	Single A-Arm with 7.6 cm Travel
Rear Suspension	Mono-Shock Swingarm with 7.6 cm Travel
Front Tyres	16x6.5-7; Duro
Rear Tyres	16x8-7; Duro
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	N.A.
Fuel Capacity	4.5 L
Ground Clearance	10.2 cm
Vehicle Size (L x W x H)	121.9 x 80 x 71.1 cm
Wheelbase	83.8 cm
Dry Weight	95 kg

ADDED FEATURES

Safety	Includes Helmet, Safety Flag, Rider Training DVD, Daytime Running Lights and Safety Tether
Speed Limiter	Parents can easily select from restricted mode or unrestricted mode based on rider skill level
Height Adjustable Floor Boards	As your child grows, the floor boards can be removed providing additional leg room and years of use
Age Limit	Suitable for ages 6 and over with adult supervision



SPEED LIMITER



ELECTRIC START



POLARIS VARIABLE TRANSMISSION




SAFETY FLAG



4 STROKE ENGINE - 49CC



DAYTIME RUNNING LIGHTS



HEIGHT ADJUSTABLE FLOOR BOARDS



APPROVED YOUTH HELMET



**SAFETY
PACKED FUN ON
FOUR WHEELS.**

*Overseas model shown with optional accessories


OUTLAW 110



SPEED LIMITER



ELECTRIC START



POLARIS VARIABLE TRANSMISSION



SAFETY FLAG



4 STROKE ENGINE - 112CC



DAYTIME RUNNING LIGHTS



REVERSE GEAR



ELECTRONIC FUEL INJECTION



APPROVED YOUTH HELMET

ENGINE & DRIVETRAIN

Displacement / Engine Type	112 cc / 4-Stroke Single Cylinder
Drive System	2WD
Horsepower / Torque	6.8 hp @ 7000 RPM / 7.5 Nm @ 5500 RPM

SUSPENSION

Front Suspension	Single A-Arm with 12.7 cm Travel
Rear Suspension	Mono-Shock Swingarm with 15.2 cm Travel
Front Tyres	19x7-8; Duro
Rear Tyres	18x9.5-8; Duro
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	N.A.
Fuel Capacity	5.9 L
Ground Clearance	10.2 cm
Vehicle Size (L x W x H)	155.6 x 93.3 x 97.8 cm
Wheelbase	105.4 cm
Dry Weight	126 kg

ADDED FEATURES

Safety	Includes Helmet, Safety Flag, Rider Training DVD, Daytime Running Lights and Safety Tether
Speed Limiter	Parents can easily select from restricted mode or unrestricted mode based on rider skill level
Age Limit	Suitable for ages 10 and over with adult supervision

**SAFETY
PACKED FUN
ON FOUR WHEELS.**



SPORTSMAN 110



ENGINE & DRIVETRAIN

Displacement / Engine Type	112 cc / 4-Stroke Single Cylinder
Drive System	2WD
Horsepower / Torque	6.8 hp @ 7000 RPM / 7.5 Nm @ 5500 RPM

SUSPENSION

Front Suspension	Single A-Arm with 12.7 cm Travel
Rear Suspension	Mono-Shock Swingarm with 15.2 cm Travel
Front Tyres	19x7-8; Duro
Rear Tyres	18x9.5-8; Duro
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	6.8 kg/13.6 kg
Fuel Capacity	7.8 L
Ground Clearance	10.2 cm
Vehicle Size (L x W x H)	156.8 x 93.3 x 97.8 cm
Wheelbase	105.4 cm
Dry Weight	133 kg

ADDED FEATURES

Safety	Includes Helmet, Safety Flag, Rider Training DVD, Daytime Running Lights and Safety Tether
Speed Limiter	Parents can easily select from restricted mode or unrestricted mode based on rider skill level
Age Limit	Suitable for ages 10 and over with adult supervision



SPEED LIMITER



ELECTRIC START



POLARIS VARIABLE TRANSMISSION



SAFETY FLAG



4 STROKE ENGINE - 112CC



DAYTIME RUNNING LIGHTS



REVERSE GEAR



ELECTRONIC FUEL INJECTION



APPROVED YOUTH HELMET

*Overseas model shown with optional accessories



FUN FOR ONE
- FOR THOSE WHO DON'T LIKE TO SHARE.

*Overseas model shown with optional accessories

ACE 150



ENGINE & DRIVETRAIN

Displacement / Engine Type	149 cc / 4-Stroke Single Cylinder
Drive System	2WD
Horsepower / Torque	9hp @ 7000 RPM / 10 Nm @ 5500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 13 cm Travel
Rear Suspension	Swingarm Dual Shocks with 15.2 cm Travel
Front Tyres	22x7-10; Wanda
Rear Tyres	22x10-10; Wanda
Wheels	Stamped Steel

DIMENSIONS

Rear Rack	22.7 kg
Fuel Capacity	9.5 L
Ground Clearance	22.9 cm
Vehicle Size (L x W x H)	215.9 x 121.9 x 147.3 cm
Wheelbase	165.1 cm
Dry Weight	260 kg

ADDED FEATURES

Safety	Includes One Helmet, Safety Flag, Rider Training DVD, Daytime LED Running Lights, Seat Belt and Side Nets
Speed Limiter	Parents can easily select from restricted mode or unrestricted mode based on rider skill level
Age Limit	Suitable for ages 10 and over with adult supervision
Adjustable Seat & Tilt Steering	As your child grows, the seat and steering wheel can be moved providing additional room and years of use



SPEED LIMITER



ELECTRIC START



POLARIS VARIABLE TRANSMISSION



SAFETY FLAG



4 STROKE ENGINE - 149CC



DAYTIME LED RUNNING LIGHTS



REVERSE GEAR



ELECTRONIC FUEL INJECTION



DISC BRAKES FRONT & REAR



APPROVED YOUTH HELMET

FUN FOR TWO

- FOR THOSE WHO DO LIKE TO SHARE.



RZR 170



ENGINE & DRIVETRAIN

Displacement / Engine Type	169 cc / 4-Stroke Single Cylinder
Drive System	2WD
Horsepower / Torque	9.4 hp @ 7000 RPM / 10.9 Nm @ 5500 RPM

SUSPENSION

Front Suspension	Single A-Arm with 12.7 cm Travel
Rear Suspension	Swingarm Dual Shocks with 12.7 cm Travel
Front Tyres	19x7-8; Duro
Rear Tyres	20x10-9; Duro
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	N.A.
Fuel Capacity	9.5 L
Ground Clearance	15.2 cm
Vehicle Size (L x W x H)	215.9 x 121.9 x 139.7 cm
Wheelbase	165.1 cm
Passenger Capacity	2
Dry Weight	224 kg

ADDED FEATURES

Safety	Includes Two Helmets, Safety Flag, Rider Training DVD, Daytime Running Lights, Seat Belts and Side Nets
Speed Limiter	Parents can easily select from restricted mode or unrestricted mode based on rider skill level
Age Limit	Suitable for ages 10 and over with adult supervision
Adjustable Driver's Seat	As your child grows, the driver's seat can be moved providing additional room and years of use



SPEED LIMITER



ELECTRIC START



POLARIS VARIABLE TRANSMISSION



SAFETY FLAG



4 STROKE ENGINE - 169CC



DAYTIME RUNNING LIGHTS



REVERSE GEAR



ELECTRONIC FUEL INJECTION



DISC BRAKES FRONT & REAR



TWO APPROVED YOUTH HELMETS

*Overseas model shown with optional accessories

POLARIS YOUTH - DARE TO COMPARE

OUTLAW 50



OUTLAW 110



COMPARE THE FACTS	POLARIS OUTLAW 50	YAMAHA YFZ50	SUZUKI QUADSPORT Z50	KAWASAKI KFX 50
HELMET	Yes ✓	*	*	*
SAFETY FLAG	Yes ✓	No	No	No
SAFETY TETHER	Yes ✓	Yes ✓	Yes ✓	Yes ✓
SPEED LIMITER	Yes ✓	Yes ✓	Yes ✓	Yes ✓
HEADLIGHTS	Yes ✓	No	No	No
HORN	Yes ✓	*	*	*
REMOVABLE FLOOR BOARDS	Yes ✓	No	No	No
ELECTRIC START	Yes ✓	Yes ✓	Yes ✓	Yes ✓
TRANSMISSION	Automatic ✓	Automatic ✓	Automatic ✓	Automatic ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	76 / 76 ✓	60 / 51	*	*

COMPARE THE FACTS	POLARIS OUTLAW 110	YAMAHA RAPTOR 90	SUZUKI QUADSPORT Z90	KAWASAKI KFX 90	HONDA TRX90X
HELMET	Yes ✓	*	*	*	*
SAFETY FLAG	Yes ✓	No	No	No	No
SAFETY TETHER	Yes ✓	*	Yes ✓	*	*
SPEED LIMITER	Yes ✓	Yes ✓	Yes ✓	Yes ✓	Yes ✓
HEADLIGHTS	Yes ✓	No	No	No	No
HORN	Yes ✓	*	*	*	*
ENGINE CAPACITY (CC)	112cc ✓	90cc	90cc	90cc	86cc
ELECTRONIC FUEL INJECTION (EFI)	Yes ✓	No	No	No	No
ELECTRIC START	Yes ✓	Yes ✓	Yes ✓	Yes ✓	Yes ✓
TRANSMISSION	Automatic ✓	Automatic ✓	Automatic ✓	Automatic ✓	Auto Clutch 4-Speed Manual
REVERSE GEAR	Yes ✓	Yes ✓	No	No	No
SUSPENSION TRAVEL FRONT/REAR (MM)	127 / 152 ✓	78 / 83	*	*	65 / 65

*Kawasaki KFX is a trademark of Kawasaki Heavy Industries Inc. Honda TRX is a trademark of Honda Motor Company Ltd. Yamaha Raptor is a trademark of Yamaha Motor Company Ltd. Suzuki QuadSport is a trademark of Suzuki Motor Corporation. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

*Overseas model shown with optional accessories

POLARIS
SPORTSMAN



POLARIS
FARMHAND



*Overseas models shown with optional accessories



POLARIS
UTE

POLARIS ATV

450

570

850

1000

FARMHAND 450 HD



SPORTSMAN 450



SPORTSMAN 450 EPS



SPORTSMAN 570 HD



SPORTSMAN 570 EPS



SPORTSMAN 570 EPS UTILITY EDITION



UTE 570 HD EPS



SPORTSMAN 6X6 570 EPS



SPORTSMAN 850 SP EPS



SPORTSMAN XP 1000 EPS



SCRAMBLER XP 1000 EPS



» POLARIS ATV

Polaris ATVs boast a long list of innovations, copied by many but duplicated by none. Discover the Farmhand, Sportsman, UTE and Scrambler models which are known around the globe as the Hardest Working, Smoothest Riding line-up of ATVs in the industry.

FARMHAND 450 HD

**HEAVY DUTY.
TWO WHEEL DRIVE.
VALUE.**



ENGINE & DRIVETRAIN

Displacement / Engine Type	500 cc / 4-Stroke OHC Single Cylinder
Drive System	2WD
Horsepower	33 hp @ 6300 RPM
Torque	40 Nm @ 5200 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	24 x 8-12; NS388
Rear Tyres	24 x 10-12; NS388
Wheels	Stamped Steel

DIMENSIONS


Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 119.4 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	308 kg

ADDED FEATURES


Heavy Duty	Driveshaft Spline Seals, Sealed Ball Joints Sealed Suspension Bushings
------------	--




33 HP



2 WHEEL DRIVE



IRS WITH 24CM OF TRAVEL



555KG TOWING CAPACITY



41KG FRONT / 82KG REAR RACK CAPACITY



HEAVY DUTY FEATURES

*Overseas models shown with optional accessories



**FOUR WHEEL DRIVE
SPORTSMAN VALUE.**

*Overseas model shown with optional accessories

SPORTSMAN 450



ENGINE & DRIVETRAIN

Displacement / Engine Type	500 cc / 4-Stroke OHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	33 hp @ 6300 RPM
Torque	40 Nm @ 5200 RPM

SUSPENSION


Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	24 x 8-12; NS388
Rear Tyres	24 x 10-12; NS388
Wheels	Stamped Steel

DIMENSIONS


Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	26.6 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 119.4 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	318 kg



33 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 24CM OF TRAVEL



555KG TOWING CAPACITY



41KG FRONT / 82KG REAR RACK CAPACITY

FOUR WHEEL DRIVE SPORTSMAN VALUE

WITH POWER STEERING.



SPORTSMAN 450 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	500 cc / 4-Stroke OHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	33 hp @ 6300 RPM
Torque	40 Nm @ 5200 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	24 x 8-12; NS388
Rear Tyres	24 x 10-12; NS388
Wheels	Stamped Steel

DIMENSIONS


Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	26.6 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 119.4 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	318 kg

ADDED FEATURES


Steering	Electronic Power Steering
----------	---------------------------




33 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 24CM OF TRAVEL



555KG TOWING CAPACITY



41KG FRONT / 82KG REAR RACK CAPACITY



ELECTRONIC POWER STEERING

*Overseas model shown with optional accessories

LEGENDARY HEAVY DUTY WORKHORSE

BUILT FOR AUSTRALIA.



SPORTSMAN 570 HD



ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	44 hp @ 7300 RPM
Torque	49 Nm @ 5900 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	25 x 8-12; 489
Rear Tyres	25 x 10-12; 489
Wheels	Stamped Steel

DIMENSIONS


Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 121.9 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	330 kg

ADDED FEATURES


Heavy Duty	Driveshaft Spline Seals, Sealed Ball Joints Sealed Suspension Bushings
------------	--




44 HP



ON DEMAND TRUE
ALL-WHEEL-DRIVE (AWD)



IRS WITH 24CM OF TRAVEL



555KG TOWING CAPACITY



41KG FRONT / 82KG REAR
RACK CAPACITY



HEAVY DUTY FEATURES

*Overseas model shown with optional accessories










**HIDE IN
PLAIN SIGHT.**

*Overseas model shown with optional accessories

SPORTSMAN 570 EPS



 44 HP	 ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)	 IRS WITH 24CM OF TRAVEL	 555KG TOWING CAPACITY	 41KG FRONT / 82KG REAR RACK CAPACITY
 ELECTRONIC POWER STEERING	 ENGINE BRAKING SYSTEM			

ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	44 hp @ 7300 RPM
Torque	49 Nm @ 5900 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	25 x 8-12; 489
Rear Tyres	25 x 10-12; 489
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 121.9 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	330 kg

ADDED FEATURES

Steering	Electronic Power Steering
Descent Control	Engine Braking System

**BUILT FOR WORK
WITH FUNCTIONALITY
IN MIND.**



SPORTSMAN 570 EPS UTILITY EDITION



ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	44 hp @ 7300 RPM
Torque	49 Nm @ 5900 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	25 x 8-12; Bear Claw 6 ply
Rear Tyres	25 x 10-12; Bear Claw 6 ply
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	40.8 kg / 81.6 kg
Towing Capacity	Front 386 kg / Rear 556 kg
Fuel Capacity	17.0 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	213 x 121.9 x 119.4 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	343 kg

ADDED FEATURES


Steering	Electronic Power Steering
Descent Control	Engine Braking System
Variable Speed Limiter	Variable Low Speed Limiter allows speed to be set between 11- 22 km/h
Utility Features	Steel Racks Front & Rear, Steel Front Bumper, Steel Front Lower Bumper, 12V Dash Switchable Rear Utility Power Outlet, Front & Rear Receiver Hitch and Work-Specific Lower Gear Ratio



44 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 24CM OF TRAVEL




386KG FRONT / 556KG REAR TOWING CAPACITY



41KG FRONT / 82KG REAR RACK CAPACITY



ELECTRONIC POWER STEERING



ENGINE BRAKING SYSTEM



6 PLY TYRES



VARIABLE SPEED LIMITER

*Overseas model shown with optional accessories

DO MORE.



UTE 570 HD EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	44 hp @ 7300 RPM
Torque	49 Nm @ 5900 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	25 x 8-12; 489
Rear Tyres	25 x 10-12; 489
Wheels	Stamped Steel

DIMENSIONS


Front/Rear Rack	40.8 kg / 180 kg
Towing Capacity	555 kg
Fuel Capacity	17.0 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	210.8 x 121.9 x 121.9 cm
Payload Capacity	220 kg
Wheelbase	128.3 cm
Dry Weight	330 kg

ADDED FEATURES


Carrying Capacity	Dump Box with 180 kg
Steering	Electronic Power Steering
Safety	Mirrors, Indicators & Horn
Heavy Duty	Driveshaft Spline Seals, Sealed Ball Joints Sealed Suspension Bushings
Descent Control	Engine Braking System & 4 Wheel Control (4WDC)



44 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 24CM OF TRAVEL




555KG TOWING CAPACITY




41KG FRONT / 180KG REAR CARRYING CAPACITY



ELECTRONIC POWER STEERING



ENGINE BRAKING SYSTEM & 4 WHEEL DESCENT CONTROL (4WDC)



DUMP BOX WITH 180KG CAPACITY



MIRRORS, INDICATORS, HORN



HEAVY DUTY FEATURES

**MORE
TRACTION WITH
SIX WHEEL
DRIVE.**



SPORTSMAN 6X6 570 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	High Performance True On-Demand 6WD/4WD
Horsepower	44 hp @ 6700 RPM
Torque	49 Nm @ 5900 RPM

SUSPENSION

Front Suspension	MacPherson Strut 20.8 cm Travel
Rear Suspension	Dual A-Arm, IRS 24.1 cm Travel
Front Tyres	26 x 8-12; PXT
Rear Tyres	26 x 10-12; PXT
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	40.8 kg / 362.8 kg
Towing Capacity	680 kg
Fuel Capacity	25.5 L
Ground Clearance	29.2 cm
Vehicle Size (L x W x H)	295 x 124.5 x 124.5 cm
Payload Capacity	507 kg
Wheelbase	213.4 cm
Dry Weight	489 kg

ADDED FEATURES

Carrying Capacity	Dump Box with 363 kg
Steering	Electronic Power Steering
Descent Control	Engine Braking System & Active Descent Control

44 HP

ON DEMAND TRUE SIX-WHEEL-DRIVE

IRS WITH 24CM OF TRAVEL

680KG TOWING CAPACITY

41KG FRONT / 363KG REAR CARRYING CAPACITY

ELECTRONIC POWER STEERING

ENGINE BRAKING SYSTEM & ACTIVE DESCENT CONTROL

DUMP BOX WITH 363KG CAPACITY

*Superseded model shown for illustrative purposes

**CAN'T BE
SEEN TO BE
BELIEVED.**



SPORTSMAN 850 SP EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	850 cc / 4-Stroke SOHC Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD
Horsepower	78 hp @ 7250 RPM
Torque	77 Nm @ 6000 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 22.9 cm Travel
Rear Suspension	Dual A-Arm, Rolled IRS 26 cm Travel
Front Tyres	26 x 8-14; CST
Rear Tyres	26 x 10-14; CST
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	55 kg / 110 kg
Towing Capacity	680 kg
Fuel Capacity	19.9 L
Ground Clearance	29.2 cm
Vehicle Size (L x W x H)	211.4 x 120.9 x 128.9 cm
Payload Capacity	261 kg
Wheelbase	134.6 cm
Dry Weight	359 kg

ADDED FEATURES


Steering	Electronic Power Steering
Descent Control	Engine Braking System & Active Descent Control



78 HP



HIGH PERFORMANCE ON DEMAND
TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 26CM OF TRAVEL




680KG TOWING CAPACITY



55KG FRONT / 110KG REAR
RACK CAPACITY



ELECTRONIC POWER
STEERING



ENGINE BRAKING SYSTEM &
ACTIVE DESCENT CONTROL

*Overseas model shown with optional accessories

**THE POWER TO
WORK HARD
AND PLAY HARDER.**



SPORTSMAN XP 1000 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	952 cc / 4-Stroke SOHC Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD
Horsepower	90 hp @ 7250 RPM
Torque	93.6 nm @ 6250 RPM

SUSPENSION

Front Suspension	Hi Clearance Arched Dual A-Arm with 22.9 cm Travel
Rear Suspension	Hi Clearance Arched Dual A-Arm, Rolled IRS 26 cm Travel
Front Tyres	26 x 8-14; CST
Rear Tyres	26 x 10-14; CST
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	55 kg / 110 kg
Towing Capacity	680 kg
Fuel Capacity	19.9 L
Ground Clearance	29.2 cm
Vehicle Size (L x W x H)	211.4 x 120.9 x 128.9 cm
Payload Capacity	261 kg
Wheelbase	134.6 cm
Dry Weight	366 kg

ADDED FEATURES


Steering	Electronic Power Steering
Descent Control	Engine Braking System & Active Descent Control
Throttle Control	3 Modes - (Performance/Work/Standard)
Instrumentation	Industry 1st Digital Gauge with Bluetooth



90 HP



HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



IRS WITH 26CM OF TRAVEL




680KG TOWING CAPACITY



55KG FRONT / 110KG REAR RACK CAPACITY



ELECTRONIC POWER STEERING



ENGINE BRAKING SYSTEM & ACTIVE DESCENT CONTROL



3 MODE THROTTLE CONTROL

*Overseas model shown with optional accessories

SCRAMBLER XP 1000 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	952 cc / 4-Stroke SOHC Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD
Horsepower	89 hp @ 7250 RPM
Torque	93 Nm @ 6000 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 22.9 cm Travel
Rear Suspension	Dual A-Arm, Rolled IRS, 26 cm Travel
Front Tyres	26 x 8-14; 489 II
Rear Tyres	26 x 10-14; 489 II
Wheels	Cast Aluminum

DIMENSIONS









Front/Rear Rack	11.3 kg / 22.7 kg
Towing Capacity	680 kg
Fuel Capacity	19.9 L
Ground Clearance	29.2 cm
Vehicle Size (L x W x H)	209 x 123 x 123 cm
Payload Capacity	131 kg
Wheelbase	134.6 cm
Dry Weight	338 kg

ADDED FEATURES

Steering	Electronic Power Steering
Suspension	Fox Podium X Shocks - 24 Postion Compression Adjustment

RACE PROVEN PERFORMANCE.

*Overseas model shown with optional accessories

 89 HP	 HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)	 ROLLED INDEPENDENT REAR SUSPENSION WITH 26CM TRAVEL	 680KG TOWING CAPACITY	 11KG FRONT / 22KG REAR RACK CAPACITY
 ELECTRONIC POWER STEERING	 FOX PODIUM X SHOCKS	 GROUND CLEARANCE 29CM		

POLARIS ATV'S - DARE TO COMPARE

FARMHAND 450 HD



COMPARE THE FACTS	POLARIS FARMHAND 450 HD	HONDA TRX420TM1	YAMAHA GRIZZLY 350 2X4
HORSEPOWER (HP)	33 ✓	*	*
TRANSMISSION	Automatic ✓	Manual (auto clutch)	Automatic ✓
TOWING CAPACITY (KG)	555 ✓	385	500
FRONT / REAR RACK CAPACITY (KG)	40.8 / 81.6 ✓	30 / 60	40 / 80
SUSPENSION TRAVEL FRONT/REAR (MM)	208 / 241 ✓	170 / 170	*
GROUND CLEARANCE (MM)	267 ✓	183	245
FUEL CAPACITY (LITRES)	17 ✓	14.7	13.5
FULL VEHICLE WIDTH FRONT STORAGE	Yes ✓	No	No
ELECTRONIC FUEL INJECTION (EFI)	Yes ✓	No	No

SPORTSMAN 450 EPS



COMPARE THE FACTS	POLARIS SPORTSMAN 450 EPS	HONDA TRX420FA6	YAMAHA GRIZZLY 450 4X4 EPS	SUZUKI KINGQUAD 400 ASI
HORSEPOWER (HP)	33 ✓	*	*	*
TRANSMISSION	Automatic ✓	Automatic ✓	Automatic ✓	Automatic ✓
FRONT / REAR RACK CAPACITY (KG)	40.8 / 81.6 ✓	30 / 60	40 / 80	30 / 60
SUSPENSION TRAVEL FRONT/REAR (MM)	208 / 241 ✓	185 / 215	160 / 180	* / 170
FUEL CAPACITY (LITRES)	17 ✓	14.7	15	16
FULL VEHICLE WIDTH FRONT STORAGE	Yes ✓	No	No	No
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	Yes ✓	No
ELECTRONIC FUEL INJECTION (EFI)	Yes ✓	Yes ✓	No	Yes ✓

UTE 570 HD EPS



COMPARE THE FACTS	POLARIS UTE 570 HD EPS	HONDA TRX500FA6	SUZUKI KINGQUAD 500AXI POWER STEERING
DUMP BOX	Yes ✓	No	No
REAR RACK CAPACITY (KG)	180 ✓	85	60
HORSEPOWER (HP)	44 ✓	*	*
TRANSMISSION	Automatic ✓	Automatic ✓	Automatic ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	208 / 241 ✓	185 / 216	*
GROUND CLEARANCE (MM)	279 ✓	239	*
FULL VEHICLE WIDTH FRONT STORAGE	Yes ✓	No	No
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	Yes ✓
MIRRORS, INDICATORS & HORN	Yes ✓	No	No
ENGINE BRAKING	Yes ✓	*	Yes ✓

SPORTSMAN 850 SP EPS



COMPARE THE FACTS	POLARIS SPORTSMAN 850 SP EPS	HONDA TRX680FA	YAMAHA KODIAK 700 EPS	SUZUKI KINGQUAD 750AXI POWER STEERING CAMO
HORSEPOWER (HP)	78 ✓	*	*	*
TRANSMISSION	Automatic ✓	Automatic ✓	Automatic ✓	Automatic ✓
TOWING CAPACITY (KG)	680 ✓	385	600	450
FRONT / REAR RACK CAPACITY (KG)	55 / 110 ✓	30 / 60	50 / 90	30 / 60
SUSPENSION TRAVEL FRONT/REAR (MM)	229 / 260 ✓	175 / 203	180 / 230	*
GROUND CLEARANCE (MM)	292 ✓	231	275	*
FUEL CAPACITY (LITRES)	19.9 ✓	16.3	18	17.5
FULL VEHICLE WIDTH FRONT STORAGE	Yes ✓	No	No	No
ELECTRONIC POWER STEERING	Yes ✓	No	Yes ✓	Yes ✓

SCRAMBLER XP 1000 EPS



COMPARE THE FACTS	POLARIS SCRAMBLER XP 1000 EPS	CAN-AM RENEGADE X XC
HORSEPOWER (HP)	89 ✓	89 ✓
TRANSMISSION	Automatic ✓	Automatic ✓
TOWING CAPACITY (KG)	680 ✓	590
FRONT / REAR RACK CAPACITY (KG)	11.3 / 22.7 ✓	N.A. / 16
SUSPENSION TRAVEL FRONT/REAR (MM)	229 / 260 ✓	✓ 229 / 236
GROUND CLEARANCE (MM)	292 ✓	267
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓

*Honda TRX is a trademark of Honda Motor Company Ltd. Yamaha Grizzly and Yamaha Kodiak are trademarks of Yamaha Motor Company Ltd. Suzuki Kingquad is a trademark of Suzuki Motor Corporation. Can-Am Renegade is a trademark of Bombardier Recreational Products Inc. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

POLARIS
ACE



*Overseas models shown with optional accessories



POLARIS ACE

500

570

900

ACE 500



ACE 570 HD EPS



ACE 900 XC EPS



» POLARIS ACE

Polaris, the leader in off-road innovation, has redefined the category again with the revolutionary ACE. The single-seat, sit in cockpit with ROPS combines the confidence and comfort of a side-by-side with the size and agility of an ATV creating an easy to ride, easy to transport, all-new off-road experience.

**THE SMARTER CHOICE
FROM EVERY ANGLE.**



ACE 500



ENGINE & DRIVETRAIN

Displacement / Engine Type	500 cc / 4-Stroke SOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	32 hp @ 6350 RPM
Torque	39 Nm @ 5200 RPM

SUSPENSION


Front Suspension	MacPherson Strut with Stabilizer Bar, 20.8 cm Travel
Rear Suspension	Dual A-Arm with Stabilizer Bar, IRS 24.1 cm Travel
Front Tyres	24 x 8-12; NS388
Rear Tyres	24 x 10-12; NS388
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	55 kg / 110 kg
Towing Capacity	680 kg
Fuel Capacity	19.9 L
Ground Clearance	26 cm
Vehicle Size (L x W x H)	229 x 122 x 171 cm
Payload Capacity	261 kg
Wheelbase	156.2 cm
Dry Weight	384 kg



32 HP




ON DEMAND TRUE
ALL-WHEEL-DRIVE (AWD)



CERTIFIED ROPS
CAB FRAME



KG
680
680KG TOWING
CAPACITY



ADJUSTABLE SEAT
& STEERING WHEEL

*Overseas model shown with optional accessories



**THE SMARTER CHOICE
FROM EVERY ANGLE.**

*Overseas model shown with optional accessories

ACE 570 HD EPS



45 HP



ON DEMAND TRUE
ALL-WHEEL-DRIVE (AWD)



CERTIFIED ROPS
CAB FRAME



680KG TOWING
CAPACITY



ADJUSTABLE SEAT
& STEERING WHEEL



ELECTRONIC POWER
STEERING



ENGINE BRAKING SYSTEM & 4 WHEEL
DESCENT CONTROL (4WDC)



HEAVY DUTY FEATURES

ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke DOHC Single Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower	45 hp @ 7400 RPM
Torque	46 Nm @ 5700 RPM

SUSPENSION

Front Suspension	MacPherson Strut with Stabilizer Bar, 20.8 cm Travel
Rear Suspension	Dual A-Arm with Stabilizer Bar, IRS 24.1 cm Travel
Front Tyres	24 x 8-12; Carlisle
Rear Tyres	24 x 10-12; Carlisle
Wheels	Stamped Steel

DIMENSIONS

Front/Rear Rack	55 kg / 110 kg
Towing Capacity	680 kg
Fuel Capacity	19.9 L
Ground Clearance	26 cm
Vehicle Size (L x W x H)	229 x 122 x 173 cm
Payload Capacity	261 kg
Wheelbase	156.2 cm
Dry Weight	388 kg

ADDED FEATURES

Steering	Electronic Power Steering
Heavy Duty	Driveshaft Spline Seals, Sealed Ball Joints Sealed Suspension Bushings
Descent Control	Engine Braking System & 4 Wheel Descent Control (4WDC)



**SINGLE
MINDED
PERFORMANCE.**

*Overseas model shown with optional accessories

ACE 900 XC EPS



78 HP




HIGH PERFORMANCE ON DEMAND
TRUE ALL-WHEEL-DRIVE (AWD)



CERTIFIED ROPS
CAB FRAME



55KG FRONT / 110KG REAR
RACK CAPACITY



ADJUSTABLE SEAT
& STEERING WHEEL



ELECTRONIC POWER
STEERING



WALKER EVANS
ADJUSTABLE NEEDLE SHOCKS



27" TYRES

ENGINE & DRIVETRAIN

Displacement / Engine Type	875 cc / 4-Stroke DOHC Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD
Horsepower	78 HP @ 8000 RPM
Torque	73 nm @ 6300 RPM

SUSPENSION

Front Suspension	Long Travel Dual A-Arm with Stabilizer Bar, Walker Evans Clicker Needle Shocks, 31.2 cm Travel
Rear Suspension	Long Travel Dual A-Arm with Stabilizer Bar, Walker Evans Clicker Needle Shocks, 32.0 cm Travel
Front Tyres	27 x 9-12; GBC Dirt Commander
Rear Tyres	27 x 11-12; GBC Dirt Commander
Wheels	Cast Aluminum

DIMENSIONS

Front / Rear Rack	55 kg / 110 kg
Towing Capacity	N.A.
Fuel Capacity	19.9 L
Ground Clearance	33.0 cm
Vehicle Size (L x W x H)	238 x 150 x 183 cm
Payload Capacity	261 kg
Wheelbase	171.5 cm
Dry Weight	489 kg

ADDED FEATURES

Steering	Electronic Power Steering
Instrumentation	Industry 1st Digital Guage with Bluetooth
Suspension	Walker Evans Adjustable Needle Shocks
Standard Accessories	Factory Fitted Quarter Doors

POLARIS ACE - DARE TO COMPARE



ACE 570
HD EPS



COMPARE THE FACTS	POLARIS ACE 570 HD EPS	ATV			SXS		
		YAMAHA KODIAK 700 EPS	SUZUKI KINGQUAD 750AXI POWER STEERING CAMO	HONDA TRX680FA	HONDA PIONEER 500	KUBOTA RTV500G-HD	JOHN DEERE XUV590I POWER STEERING
ROLL OVER PROTECTION STRUCTURE (ROPS)	Yes ✓	No	No	No	Yes ✓	Yes ✓	Yes ✓
HORSEPOWER (HP)	44 ✓	*	*	*	*	15.8	32
TOWING CAPACITY (KG)	680 ✓	600	450	385	453	500	499
SUSPENSION TRAVEL FRONT/REAR (MM)	208 / 240 ✓	180 / 230	*	175 / 203	150 / 150	*	203 / 203
FUEL CAPACITY (LITRES)	19.9	18	17.5	16.3	15	20	28 ✓
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	Yes ✓	No	No	No	Yes ✓
ENGINE BRAKING	Yes ✓	Yes ✓	Yes ✓	*	*	Yes ✓	No

*Yamaha Kodiak is a trademark of Yamaha Motor Company Ltd. Suzuki Kingquad is a trademark of Suzuki Motor Corporation. Honda TRX and Pioneer are trademarks of Honda Motor Company Ltd. Kubota RTV is a trademark of Kubota Corporation. John Deere Gator XUV is a trademark of Deere & Company. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

*Overseas model shown with optional accessories

POLARIS RANGER



POLARIS RANGER

MID SIZE

FULL SIZE

CREW

RANGER EV



RANGER 800 6X6



RANGER XP 1000 EPS



RANGER CREW 570 EPS



RANGER 500



RANGER XP 900 EPS



RANGER XP 1000 EPS - HUNTER EDITION



RANGER CREW XP 1000 EPS



RANGER 570 HD EPS



RANGER DIESEL 1000 HD EPS



RANGER CREW DIESEL



*Overseas models shown with optional accessories

» POLARIS RANGER

The Hardest Working, Smoothest Riding and most comprehensive line-up of side-by-side utility vehicles on the planet. Choose from 2,3,4 or 6 seat models, Petrol, Diesel or Electric Engines and customise your RANGER with the biggest selection of Polaris Engineered Accessories including the complete Pro-Fit cabs. Tow more, carry more, seat more and do more with Polaris RANGER.

**PERFORMANCE AND
VERSATILITY IN
ONE CHARGE.**



RANGER EV (ELECTRIC VEHICLE)



ENGINE & DRIVETRAIN

Motor Type	Single 48-Volt, High-Efficiency, AC-Induction Motor
Drive System	True On-Demand AWD/2WD/Turf Mode
Horsepower	30 hp

SUSPENSION

Front Suspension	MacPherson Strut with 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS with 22.9 cm Travel
Front / Rear Tyres	25 x 9-12; Carlisle / 25 x 9-12; Carlisle
Wheels	Stamped Steel

DIMENSIONS


Dump Box Capacity	226.8 kg
Towing Capacity	680 kg
Battery Capacity	Traditional Lead-Acid
Ground Clearance	25.4 cm
Vehicle Size (L x W x H)	279 x 147 x 185 cm
Payload Capacity	454 kg
Passenger Capacity	2
Wheelbase	182.9 cm
Dry Weight	783 kg




30 HP




ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 22.9CM OF TRAVEL



DUMP BOX CAPACITY - 227KG



ZERO EMISSIONS
= WORK INDOORS



PLUG IN ELECTRIC

*Overseas model shown with optional accessories




**RANGER CONFIDENCE
FOR THE PRICE OF A QUAD.**

*Overseas model shown with optional accessories


RANGER 500




32 HP




ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 227KG



SEAT BELT INTERLOCK



SPEED KEY READY

ENGINE & DRIVETRAIN

Displacement / Engine Type	500cc / 4-Stroke SOHC Single Cylinder
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	32 hp @ 6350 RPM / 39 Nm @ 5200 RPM

SUSPENSION

Front Suspension	MacPherson Strut with 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS with 25.4 cm Travel
Front / Rear Tyres	25 x 8-12; 489 / 25 x 10-12; 489
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	226.8 kg
Towing Capacity	680 kg
Fuel Capacity	34.1 L
Ground Clearance	25.4 cm
Vehicle Size (L x W x H)	279 x 147 x 185 cm
Payload Capacity	454 kg
Passenger Capacity	2
Wheelbase	185.4 cm
Dry Weight	490 kg

ADDED FEATURES

Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model can readily accept the Speed Key Accessory. Speed Key governs speed to 40 km/h

**THE BEST SPEC'D
SIDE-BY-SIDE
EVER.**




RANGER 570 HD EPS




44 HP




ON DEMAND TRUE
ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 227KG




SEAT BELT INTERLOCK



SPEED KEY READY



ELECTRONIC POWER
STEERING



ENGINE BRAKING SYSTEM & 4 WHEEL
DESCENT CONTROL (4WDC)



HEAVY DUTY FEATURES

ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke Single Cylinder DOHC
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	44 hp @ 6700 RPM / 48 Nm @ 6000 RPM

SUSPENSION

Front Suspension	MacPherson Strut with 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	25 x 8-12; 489 / 25 x 10-12; 489
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	227 kg
Towing Capacity	680 kg
Fuel Capacity	34.1 L
Ground Clearance	25.4 cm
Vehicle Size (L x W x H)	279 x 147 x 185 cm
Payload Capacity	454 kg
Passenger Capacity	2
Wheelbase	185.4 cm
Dry Weight	499 kg

ADDED FEATURES

Heavy Duty	Upgraded Rear Driveshaft, Grease Nipples, HD Sway Bar, Sealed Suspensions Bushings, Sealed Ball Joints, Driveshaft Spline Seals
Steering	Electronic Power Steering
Descent Control	Engine Braking System & 4 Wheel Descent Control (4WDC)
Safety Technologies	Seat Belt Interlock & Speed Key Capable

*Overseas model shown with optional accessories



**MORE
TRACTION
WITH SIX WHEEL DRIVE.**

*Overseas model shown with optional accessories


RANGER 800 6X6




40 HP



ON DEMAND TRUE SIX-WHEEL-DRIVE (AWD)



IRS WITH 22.9CM OF TRAVEL



DUMP BOX CAPACITY - 567KG



TOWING CAPACITY - 907KG

ENGINE & DRIVETRAIN

Displacement / Engine Type	760 cc / 4-Stroke Twin Cylinder
Drive System	True On-Demand 6WD/Rear 4WD/ Mid Differential Lock
Horsepower / Torque	40 hp @ 6250 RPM / 51 Nm @ 4500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 24.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 22.9 cm Travel
Front / Rear Tyres	25 x 10-12; 489 / 25 x 11-12; 489
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	567 kg
Towing Capacity	907 kg
Fuel Capacity	34.1 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	348 x 152 x 193 cm
Payload Capacity	907 kg
Passenger Capacity	3
Wheelbase	266.7 cm
Dry Weight	704 kg

ADDED FEATURES

Storage	Lockable Rear Storage Boxes
---------	-----------------------------



**POWER
AND VALUE.**

*Overseas model shown with optional accessories


RANGER XP 900 EPS




68 HP




ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 454KG



SEAT BELT INTERLOCK



SPEED KEY READY



ELECTRONIC POWER STEERING

ENGINE & DRIVETRAIN

Displacement / Engine Type	875 cc / 4-Stroke Twin Cylinder
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	68 hp @ 6750 RPM / 72 Nm @ 6500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	25 x 10-12; 489 / 25 x 11-12; 489
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	296 x 152 x 193 cm
Payload Capacity	680 kg
Passenger Capacity	3
Wheelbase	206 cm
Dry Weight	606 kg

ADDED FEATURES

Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model can readily accept the Speed Key Accessory. Speed Key governs speed to 40 km/h
Steering	Electronic Power Steering












**THE WORLD'S
MOST POWERFUL
UTILITY SIDE-BY-SIDE.**

*Overseas model shown with optional accessories

RANGER XP 1000 EPS



 80 HP	 ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)	 UNLOCKING REAR DIFF	 IRS WITH 25.4CM OF TRAVEL	 DUMP BOX CAPACITY - 454KG
 SEAT BELT INTERLOCK	 SPEED KEY READY	 ELECTRONIC POWER STEERING	 3 MODE THROTTLE CONTROL	

ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	Pro Lock On-Demand AWD/2WD/VersaTrac Turf Mode with 3-Mode Throttle Control
Horsepower / Torque	80 hp @ 7700 RPM / 83 Nm @ 5900 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	26 x 9-12; PXT / 26 x 11-12; PXT
Wheels	Cast Aluminum

DIMENSIONS

Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	296 x 152 x 193 cm
Payload Capacity	680 kg
Passenger Capacity	3
Wheelbase	206 cm
Dry Weight	606 kg

ADDED FEATURES

Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model can readily accept the Speed Key Accessory. Speed Key governs speed to 40 km/h
Steering	Electronic Power Steering
Throttle Control	3 Modes - (Performance/Work/Standard)



**THE RANGER
YOU WILL WANT
TO BE SEEN IN...
BUT WON'T BE.**

*Overseas model shown with optional accessories

RANGER XP 1000 EPS - HUNTER EDITION



ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	Pro Lock On-Demand AWD/2WD/VersaTrac Turf Mode with 3-Mode Throttle Control
Horsepower / Torque	80 hp @ 7700 RPM / 83 Nm @ 5900 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	26 x 9-12; PXT / 26 x 11-12; PXT
Wheels	Stamped Steel

DIMENSIONS


Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	296 x 152 x 193 cm
Payload Capacity	680 kg
Passenger Capacity	3
Wheelbase	206 cm
Dry Weight	652 kg

ADDED FEATURES

Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model readily accepts Speed Key Accessory. Speed Key governs speed to 40 km/h
Steering	Electronic Power Steering
Throttle Control	3 Modes - (Performance/Work/Standard)
Hunter Edition Features	Engine Braking System & Active Descent Control, Polaris HD 4500lb Winch, Gun Scabbards




80 HP




ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 454KG



SEAT BELT INTERLOCK




SPEED KEY READY



ELECTRONIC POWER STEERING



3 MODE THROTTLE CONTROL



ENGINE BRAKING SYSTEM & ACTIVE DESCENT CONTROL

**ONE FARM.
ONE FUEL.**




RANGER DIESEL 1000 HD EPS




24 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF




IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 454KG



ELECTRONIC POWER STEERING



ENGINE BRAKING SYSTEM & 4 WHEEL DESCENT CONTROL (4WDC)



HEAVY DUTY FEATURES

ENGINE & DRIVETRAIN

Displacement / Engine Type	1028 cc / 3-Cylinder Diesel
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	24 hp @ 3600 RPM / 50 Nm @ 2600 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	25 x 10-12; PXT / 25 x 11-12; PXT
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	296 x 152 x 193 cm
Payload Capacity	680 kg
Passenger Capacity	3
Wheelbase	206 cm
Dry Weight	649 kg

ADDED FEATURES

Heavy Duty	Upgraded Rear Driveshaft, Grease Nipples, HD Sway Bar, Sealed Suspensions Bushings, Sealed Ball Joints, Driveshaft Spline Seals
Steering	Electronic Power Steering
Descent Control	Engine Braking System & 4 Wheel Descent Control (4WDC)

*Overseas model shown with optional accessories












**TOW MORE,
CARRY MORE,
DO MORE, SEAT 4.**

*Overseas model shown with optional accessories

RANGER CREW 570 EPS



 44 HP	 ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)	 UNLOCKING REAR DIFF	 IRS WITH 25.4CM OF TRAVEL	 DUMP BOX CAPACITY - 227KG
 SEAT BELT INTERLOCK	 SPEED KEY READY	 ELECTRONIC POWER STEERING	 SEATS 4	

ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / 4-Stroke Single Cylinder DOHC
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	44 hp @ 6700 RPM / 48 Nm @ 6000 RPM

SUSPENSION

Front Suspension	MacPherson Strut 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	25 x 10-12; 489 / 25 x 10-12; 489
Wheels	Cast Aluminum

DIMENSIONS

Dump Box Capacity	227 kg
Towing Capacity	680 kg
Fuel Capacity	34.1 L
Ground Clearance	25.4 cm
Vehicle Size (L x W x H)	361 x 152 x 185 cm
Payload Capacity	567 kg
Passenger Capacity	4
Wheelbase	266.7 cm
Dry Weight	613 kg

ADDED FEATURES

Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model can readily accept the Speed Key Accessory. Speed Key governs speed to 40 km/h
Steering	Electronic Power Steering

**TOW MORE, CARRY MORE,
DO MORE, SEAT 6.**



RANGER CREW XP 1000 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	Pro Lock On-Demand AWD/2WD/VersaTrac Turf Mode with 3-Mode Throttle Control
Horsepower / Torque	80 hp @ 7700 RPM / 83 Nm @ 5900 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	26 x 9-12; PXT / 26 x 11-12; PXT
Wheels	Cast Aluminum

DIMENSIONS

Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	28.7 cm
Vehicle Size (L x W x H)	377 x 155 x 193 cm
Payload Capacity	794 kg
Passenger Capacity	6
Wheelbase	287 cm
Dry Weight	720 kg

ADDED FEATURES


Seat Belt Interlock	Governs speed to 24 km/h when the driver's Seat Belt is not engaged.
Speed Key Ready	This model can readily accept the Speed Key Accessory. Speed Key governs speed to 40 km/h
Steering	Electronic Power Steering
Throttle Control	3 Modes - (Performance/Work/Standard)




80 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 454KG




SEAT BELT INTERLOCK



SPEED KEY READY



ELECTRONIC POWER STEERING



3 MODE THROTTLE CONTROL



SEATS 6

*Overseas model shown with optional accessories



**ONE FARM.
ONE FUEL. SEAT 6.**

*Overseas model shown with optional accessories

RANGER CREW DIESEL



ENGINE & DRIVETRAIN

Displacement / Engine Type	1028 cc / 3-Cylinder Diesel
Drive System	True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	24 hp @ 3600 RPM / 50 Nm @ 2600 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front / Rear Tyres	26 x 9-12; PXT / 26 x 11-12; PXT
Wheels	Stamped Steel

DIMENSIONS

Dump Box Capacity	454 kg
Towing Capacity	907 kg
Fuel Capacity	37.9 L
Ground Clearance	28.7 cm
Vehicle Size (L x W x H)	377 x 155 x 193 cm
Payload Capacity	794 kg
Passenger Capacity	6
Wheelbase	287 cm
Dry Weight	767 kg




24 HP



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



UNLOCKING REAR DIFF



IRS WITH 25.4CM OF TRAVEL



DUMP BOX CAPACITY - 454KG



SEATS 6

POLARIS RANGER - DARE TO COMPARE

RANGER 500



COMPARE THE FACTS	POLARIS RANGER 500	HONDA PIONEER 500	KAWASAKI MULE SX 4X4 XC	KUBOTA RTV500G-HD	JOHN DEERE XUV560
HORSEPOWER (HP)	32 ✓	*	13.5	15.8	16
TOWING CAPACITY (KG)	680 ✓	453	500	500	499
REAR TRAY CAPACITY (KG)	227 ✓	203	181	200	181
DUMP BOX STANDARD	Yes ✓	No	Yes ✓	Yes ✓	Yes ✓
TURF MODE (UNLOCKING REAR DIFF)	Yes ✓	No	Yes ✓	Yes ✓	Yes ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	229 / 254 ✓	150 / 150	78 / 79	*	203 / 203
FUEL CAPACITY (LITRES)	34 ✓	15	16	20	19
SPEED KEY READY	Yes ✓	*	*	*	*

RANGER 570 HD EPS



COMPARE THE FACTS	POLARIS RANGER 570 HD EPS	HONDA PIONEER 500	KUBOTA RTV500G-HD	JOHN DEERE XUV590i POWER STEERING
HORSEPOWER (HP)	44 ✓	*	15.8	32
TOWING CAPACITY (KG)	680 ✓	453	500	499
REAR TRAY CAPACITY (KG)	227 ✓	203	200	181
DUMP BOX STANDARD	Yes ✓	No	Yes ✓	Yes ✓
TURF MODE (UNLOCKING REAR DIFF)	Yes ✓	No	Yes ✓	Yes ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	229 / 254 ✓	150 / 150	*	203 / 203
FUEL CAPACITY (LITRES)	34 ✓	15	20	28
SPEED KEY READY	Yes ✓	*	*	*
ELECTRONIC POWER STEERING	Yes ✓	No	No	Yes ✓
ENGINE BRAKING	Yes ✓	*	Yes ✓	No

*Kubota RTV is a trademark of Kubota Corporation. John Deere Gator XUV is a trademark of Deere & Company. Kawasaki Mule is a trademark of Kawasaki Heavy Industries Inc. Honda Pioneer is a trademark of Honda Motor Company Ltd. Can-Am Defender is a trademark of Bombardier Recreational Products Inc. Yamaha Viking is a trademark of Yamaha Motor Company Ltd. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

RANGER XP 900 EPS



COMPARE THE FACTS	POLARIS RANGER XP 900 EPS	HONDA PIONEER 700	CAN-AM DEFENDER HD8	YAMAHA VIKING	JOHN DEERE XUV825i
HORSEPOWER (HP)	68 ✓	*	50	*	50
TOWING CAPACITY (KG)	907 ✓	680	907 ✓	680	680
REAR TRAY CAPACITY (KG)	454 ✓	453	454 ✓	272	454 ✓
TURF MODE (UNLOCKING REAR DIFF)	Yes ✓	*	No	*	Yes ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	254 / 254 ✓	200 / 230	254 / 254 ✓	205 / 205	203 / 229
GROUND CLEARANCE (MM)	305 ✓	261	280	300	280
SPEED KEY READY	Yes ✓	*	Yes ✓	*	*
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	No	Yes ✓	*

RANGER XP 1000 EPS



COMPARE THE FACTS	POLARIS RANGER XP 1000 EPS	HONDA PIONEER 1000	CAN-AM DEFENDER DPS HD10	YAMAHA VIKING	JOHN DEERE XUV825i
HORSEPOWER (HP)	80 ✓	*	72	*	50
TOWING CAPACITY (KG)	907 ✓	900	907 ✓	680	680
REAR TRAY CAPACITY (KG)	454 ✓	450	454 ✓	272	454 ✓
SUSPENSION TRAVEL FRONT/REAR (MM)	254 / 254 ✓	267 / 254 ✓	254 / 254 ✓	205 / 205	203 / 229
VEHICLE DRY WEIGHT (KG)	606 ✓	*	641	615	747
SPEED KEY READY	Yes ✓	*	Yes ✓	*	*
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	Yes ✓	Yes ✓	*

RANGER DIESEL 1000 HD EPS



COMPARE THE FACTS	POLARIS RANGER DIESEL 1000 HD EPS	KAWASAKI MULE PRO-DX EPS	KUBOTA RTV-X1120D	JOHN DEERE XUV855D
TOP SPEED (KM/H)	59.5 ✓	*	46.4	51.5
TOWING CAPACITY (KG)	907 ✓	907 ✓	590	680
SUSPENSION TRAVEL FRONT/REAR (MM)	254 / 254 ✓	222 / 220	205 / 205	203 / 229
GROUND CLEARANCE (MM)	305 ✓	265	280	280
FUEL CAPACITY (LITRES)	37.9 ✓	30	30	27.6
VEHICLE DRY WEIGHT (KG)	649 ✓	799	935	743
ELECTRONIC POWER STEERING	Yes ✓	Yes ✓	Yes ✓	No
ALTERNATOR OUTPUT (AMPS)	110 ✓	*	*	55

POLARIS
GENERAL
 ★★★★★



*Overseas models shown with optional accessories



POLARIS GENERAL

2 SEATER

4 SEATER

GENERAL 1000 EPS - PREMIUM



GENERAL 1000 EPS - DELUXE



GENERAL 4 1000 EPS



» POLARIS GENERAL


The Polaris GENERAL sets the versatility benchmark: ultimate versatility without compromise. Built for the work-hard, play-hard riders who demand ultimate versatility to Battle It All. The Polaris GENERAL has class-leading features needed to tackle the trails and a work ethic to battle the toughest jobs.





**BATTLE
IT ALL.**


GENERAL 1000 EPS - PREMIUM





- 


100 HP
- 


HIGH PERFORMANCE ON DEMAND
TRUE ALL-WHEEL-DRIVE (AWD)
- 

UNLOCKING REAR DIFF
- 

DUMP BOX CAPACITY
- 272KG
- 

680KG TOWING
CAPACITY
- 

ELECTRONIC POWER
STEERING
- 

POLARIS HD
4500 LB WINCH
- 

ENGINE BRAKING SYSTEM

ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	100 hp @ 8500 RPM / 87 Nm @ 7500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 31.1 cm Travel
Rear Suspension	Dual A-Arm, IRS 33.5 cm Travel
Front / Rear Tyres	27 x 9-14; Maxxis Coronado / 27 x 11-14; Maxxis Coronado
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./272.2 kg
Towing Capacity	680 kg
Fuel Capacity	35.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	300 x 156.7 x 187 cm
Payload Capacity	499 kg
Passenger Capacity	2
Wheelbase	206 cm
Dry Weight	676 kg

ADDED FEATURES

Descent Control	Engine Braking System
Winch	Polaris HD 4500lb Winch
Instrumentation	Customisable Digital Instrumentation Cluster
Standard Accessories	Front Bumper

*Overseas model shown with optional accessories

BATTLE IT ALL.



GENERAL 1000 EPS - DELUXE



ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	100 hp @ 8500 RPM / 87 Nm @ 7500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with FOX Performance Series - 2.0 Podium X Shocks, 31.1 cm Travel
Rear Suspension	Dual A-Arm with FOX Performance Series - 2.0 Podium X Shocks, 33.5 cm Travel
Front / Rear Tyres	27 x 9-14; Maxxis Coronado / 27 x 11-14; Maxxis Coronado
Wheels	Cast Aluminum

DIMENSIONS

Dump Box Capacity	272 kg
Towing Capacity	680 kg
Fuel Capacity	35.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	300 x 156.7 x 190.5 cm
Payload Capacity	499 kg
Passenger Capacity	2
Wheelbase	206 cm
Dry Weight	700 kg

ADDED FEATURES

Descent Control	Engine Braking System
Winch	Polaris HD 4500lb Winch
Instrumentation	Customisable Digital Instrumentation Cluster
Standard Accessories	Front Bumper, Sports Roof, Rear View Mirror, MTX Audio Sound System

*Overseas model shown with optional accessories












**BATTLE
IT ALL
WITH FOUR.**

*Overseas model shown with optional accessories

GENERAL 4 1000 EPS



 100 HP	 HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)	 UNLOCKING REAR DIFF	 DUMP BOX CAPACITY - 272KG	 680KG TOWING CAPACITY
 ELECTRONIC POWER STEERING	 POLARIS HD 4500 LB WINCH	 ENGINE BRAKING SYSTEM	 SEATS 4	

ENGINE & DRIVETRAIN

Displacement / Engine Type	999 cc / 4-Stroke Twin Cylinder
Drive System	High Performance True On-Demand AWD/2WD/VersaTrac Turf Mode
Horsepower / Torque	100 hp @ 8500 RPM / 87 Nm @ 7500 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 31.1 cm Travel
Rear Suspension	Dual A-Arm, IRS 33.5 cm Travel
Front / Rear Tyres	27 x 9-14; Maxxis Coronado / 27 x 11-14; Maxxis Coronado
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./272.2 kg
Towing Capacity	680 kg
Fuel Capacity	35.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	300 x 156.7 x 187 cm
Payload Capacity	499 kg
Passenger Capacity	4
Wheelbase	206 cm
Dry Weight	676 kg

ADDED FEATURES

Descent Control	Engine Braking System
Winch	Polaris HD 4500lb Winch
Instrumentation	Customisable Digital Instrumentation Cluster
Standard Accessories	Front Bumper



POLARIS GENERAL - DARE TO COMPARE

GENERAL 1000 EPS PREMIUM



COMPARE THE FACTS	POLARIS GENERAL 1000 EPS PREMIUM	CAN-AM COMMANDER LIMITED	YAMAHA WOLVERINE EPS	KAWASAKI TERYX LE	JOHN DEERE RSX850i SPORT
ENGINE CAPACITY / HORSEPOWER (HP)	999cc / 100 ✓	976cc / 85	708cc / *	783cc / *	839cc / 62
SUSPENSION TRAVEL FRONT/REAR (MM)	311 / 335 ✓	254 / 254	246 / 269	202 / 210	229 / 229
GROUND CLEARANCE (MM)	305 ✓	279	290	285	267
TOWING CAPACITY (KG)	680 ✓	680 ✓	680 ✓	590	544
DUMP BOX STANDARD	Yes ✓	Yes ✓	No	Yes ✓	Yes ✓
REAR TRAY CAPACITY (KG)	272 ✓	272 ✓	136	272 ✓	181
WINCH	Yes ✓	Yes ✓	No	No	Yes ✓
DOORS	Yes ✓	No	Yes ✓	Yes ✓	Yes ✓

John Deere RSX is a trademark of Deere & Company. Kawasaki Teryx is a trademark of Kawasaki Heavy Industries Inc. Can-Am Commander is a trademark of Bombardier Recreational Products Inc. Yamaha Wolverine is a trademark of Yamaha Motor Company Ltd. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

*Overseas model shown with optional accessories



*Overseas models shown with optional accessories

POLARIS RZR

SPORT

XTREME PERFORMANCE

RZR S 570 EPS



RZR S 900 EPS



RZR XP TURBO EPS



RZR XP 4 TURBO EPS



» POLARIS RZR

The benchmark for sport side-by-side performance, only RZR delivers the ultimate combination of power, suspension, agility, comfort and customization. Fueled by relentless innovation, RZR dominates every type of off-road terrain.

**GREAT PERFORMANCE.
AMAZING VALUE.**



RZR S 570 EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	567 cc / ProStar 570; 4-Stroke DOHC Single Cylinder
Drive System	High Performance True On-Demand AWD/2WD
Horsepower / Torque	45 hp @ 6700 RPM / 49 Nm @ 5700 RPM

SUSPENSION

Front Suspension	Dual A-Arm with 30.5 cm Travel
Rear Suspension	Dual A-Arm with Stabilizer Bar and 31.75 cm Travel
Front / Rear Tyres	27 x 9-12; Maxxis Bighorn / 27 x 12-12; Maxxis Bighorn
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./136.1 kg
Towing Capacity	680 kg
Fuel Capacity	27.4 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	273 x 152.4 x 177.3 cm
Payload Capacity	336 kg
Passenger Capacity	2
Wheelbase	205.7 cm
Dry Weight	513 kg




45 HP



HIGH PERFORMANCE ON DEMAND
TRUE ALL-WHEEL-DRIVE (AWD)



ELECTRONIC POWER
STEERING



INDEPENDENT REAR SUSPENSION
- 31.75CM OF TRAVEL



ZF SACHS TWIN
TUBE SHOCKS

*Overseas model shown with optional accessories



**MORE POWER.
MORE PERFORMANCE.**

RZR S 900 EPS




75 HP



HIGH PERFORMANCE ON DEMAND
TRUE ALL-WHEEL-DRIVE (AWD)



ELECTRONIC POWER
STEERING



INDEPENDENT REAR SUSPENSION
- 33.5CM OF TRAVEL



2" WALKER EVANS
NEEDLE SHOCKS



27" TYRES



ENGINE BRAKING SYSTEM

ENGINE & DRIVETRAIN

Displacement / Engine Type	875 cc / ProStar 900; 4-Stroke DOHC Twin Cylinder
Drive System	True On-Demand AWD/2WD
Horsepower / Torque	75 hp @ 7500 RPM / 75 Nm @ 6300 RPM

SUSPENSION

Front Suspension	Dual A-Arm with Stabilizer Bar and 31.1 cm Travel
Rear Suspension	Dual A-Arm with Stabilizer Bar and 33.5 cm Travel
Front / Rear Tyres	27 x 9-12; GBC Dirt Commander / 27 x 11-12; GBC Dirt Commander
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./136.1 kg
Towing Capacity	680 kg
Fuel Capacity	36.0 L
Ground Clearance	31.8 cm
Vehicle Size (L x W x H)	269.2 x 152.4 x 181.6 cm
Payload Capacity	336 kg
Passenger Capacity	2
Wheelbase	200.7 cm
Dry Weight	546 kg

ADDED FEATURES

Descent Control	Engine Braking System
Standard Accessories	Factory Fitted Quarter Doors
Suspension	2" Walker Evans Needle Shocks - 16 Position Compression Adjustment

*Overseas model shown with optional accessories

RZR XP TURBO EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	925 cc / ProStar Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged
Drive System	High Performance True On-Demand AWD/2WD
Horsepower / Torque	168 hp @ 8000 RPM / 155 Nm @ 5400 RPM

SUSPENSION

Front Suspension	Dual A-Arm with Stabilizer Bar and 40.6 cm Travel
Rear Suspension	Trailing Arm with Stabilizer Bar and 45.7 cm Travel
Front / Rear Tyres	29 x 9-14 Maxxis Bighorn / 29 x 11-14 Maxxis Bighorn
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./136.1 kg
Towing Capacity	N.A.
Fuel Capacity	36.0 L
Ground Clearance	34.3 cm
Vehicle Size (L x W x H)	302.2 x 162.6 x 187.3 cm
Payload Capacity	336 kg
Passenger Capacity	2
Wheelbase	228.6 cm
Dry Weight	679 kg

ADDED FEATURES

Steering	Race-inspired 1.5 Turn Steering Rack
Cooling	Upgraded Cooling System with a 20% larger Engine Radiator, 40% larger Grill, Variable Speed Brushless Fan, larger Dual-sided Rear Intakes
Suspension	2.5" Front / 3" Rear Fox Internal Bypass Shocks - 24 Position Compression Adjustment

THE WORLD'S MOST POWERFUL SIDE-BY-SIDE

*Overseas model shown with optional accessories




168 HP



HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



ELECTRONIC POWER STEERING



INDEPENDENT REAR SUSPENSION - 45.7CM OF TRAVEL



2.5" FRONT / 3" REAR FOX INTERNAL BYPASS SHOCKS



29" TYRES



TRAILING ARM REAR SUSPENSION 45.7CM TRAVEL



3 FRONT / 2 REAR PISTON BRAKE CALLIPERS

RZR XP 4 TURBO EPS



ENGINE & DRIVETRAIN

Displacement / Engine Type	925 cc / ProStar Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged
Drive System	High Performance True On-Demand AWD/2WD
Horsepower / Torque	168 hp @ 8000 RPM / 155 Nm @ 5400 RPM

SUSPENSION

Front Suspension	Dual A-Arm with Stabilizer Bar and 40.6 cm Travel
Rear Suspension	Trailing Arm with Stabilizer Bar and 45.7 cm Travel
Front / Rear Tyres	29 x 9-14 Maxxis Bighorn / 29 x 11-14 Maxxis Bighorn
Wheels	Cast Aluminum

DIMENSIONS

Front/Rear Rack	N.A./136.1 kg
Towing Capacity	N.A.
Fuel Capacity	36.0 L
Ground Clearance	34.3 cm
Vehicle Size (L x W x H)	370.8 x 162.6 x 187.3 cm
Payload Capacity	408.2 kg
Passenger Capacity	4
Wheelbase	297.2 cm
Dry Weight	767 kg

ADDED FEATURES

Steering	Race-inspired 1.5 Turn Steering Rack
Cooling	Upgraded Cooling System with a 20% larger Engine Radiator, 40% larger Grill, Variable Speed Brushless Fan, larger Dual-sided Rear Intakes
Suspension	2.5" Front / 3" Rear Fox Internal Bypass Shocks - 24 Position Compression Adjustment

**TWO'S
COMPANY
BUT FOUR'S A PARTY**

*Overseas model shown with optional accessories




168 HP




HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



ELECTRONIC POWER STEERING



INDEPENDENT REAR SUSPENSION - 45.7CM OF TRAVEL



2.5" FRONT / 3" REAR FOX INTERNAL BYPASS SHOCKS



29" TYRES



TRAILING ARM REAR SUSPENSION 45.7CM TRAVEL



3 FRONT / 2 REAR PISTON BRAKE CALLIPERS



SEATS 4



POLARIS RZR - DARE TO COMPARE

**RZR S
900 EPS**



**RZR XP
TURBO EPS**



COMPARE THE FACTS	POLARIS RZR S 900 EPS	CAN-AM COMMANDER DPS	YAMAHA WOLVERINE EPS	JOHN DEERE RSX850i SPORT
ENGINE CAPACITY / HORSEPOWER (HP)	875cc / 75 ✓	799cc / 71	708cc / *	839cc / 62
SUSPENSION TRAVEL FRONT/REAR (MM)	311 / 335 ✓	254 / 254	246 / 269	229 / 229
GROUND CLEARANCE (MM)	318 ✓	279	290	267
VEHICLE DRY WEIGHT (KG)	546 ✓	586	561	648
TOWING CAPACITY (KG)	680 ✓	680 ✓	680 ✓	544
DOORS	Yes ✓	No	Yes ✓	Yes ✓

COMPARE THE FACTS	POLARIS RZR XP TURBO EPS	CAN-AM MAVERICK X3 X DS	CAN-AM MAVERICK X3 X RS
HORSEPOWER (HP)	168 HP @ 8000 RPM ✓	154 HP @ 7500 RPM	154 HP @ 7500 RPM
TORQUE	155nm @ 5400 RPM ✓	153nm @ 7000 RPM	153nm @ 7000 RPM
POWER TO WEIGHT RATIO	0.112 ✓	0.103	0.097
VEHICLE DRY WEIGHT (KG)	679	676 ✓	718
SUSPENSION	2.5" Front / 3" Rear Fox Podium Internal Bypass Shocks ✓	2.5" Front / 2.5" Rear Fox Podium RC2 Shocks	2.5" Front / 3" Rear Fox Podium Internal Bypass Shocks ✓
BRAKE CALIPERS	Triple Bore Front / Dual Bore Rear ✓	Dual Bore Front / Dual Bore Rear	Dual Bore Front / Dual Bore Rear
STEERING	1.5 Turn Steering Rack ✓	*	*

John Deere RSX is a trademark of Deere & Company. Can-Am Commander and Maverick X3 are trademarks of Bombardier Recreational Products Inc. Yamaha Wolverine is a trademark of Yamaha Motor Company Ltd. All comparative data sourced from manufacturer websites and brochure downloads from those sites at 6-3-2017. *Information not available.

*Overseas model shown with optional accessories

POLARIS AMBASSADORS



»» **MATTY MINGAY** HOT WHEELS STUNT MAN / POLARIS AMBASSADOR

Matt Mingay is Australia's foremost motorsport stuntman on both two wheels and four and boasts over 1.2 million Facebook followers. His Hot Wheels Drift cars are a spectacular exhibition of skill and bravery at numerous VB Supercar rounds Australia wide.

Now officially part of the Polaris Racing Team, he will return again for a full tilt assault on the SXS Australian Championship in his 168HP Polaris RZR XP Turbo and the legendary Finke Desert Race. Not just turning left or right, SXS racing adds "UP" to the mix as they hit the big jumps to fly through the air and bump wheels with other racers.

Joining Matt as our junior team member is Matt's son Madzy in his Polaris RZR 170, already carving himself a strong following on-line with his antics in his RZR.

[f / mattymingay](#)



»» **MADZY MINGAY** SON OF MATTY MINGAY / POLARIS AMBASSADOR



»» **CODY CROCKER** POLARIS RACING TEAM - DRIVER

A name synonymous with off-road and rally, Cody Crocker has been with Polaris since the wheels of a Polaris RZR first turned on a racetrack with the introduction of the ground-breaking RZR. A master of the finesse of rallying for over 20 years with his co-driver Greg Foletta, in 2011, Polaris and Cody ventured into the rally scene piloting their RZR to winning the SXS Challenge for four years in a row. Then in 2016, Cody explored the SXS Australian Championship and three firsts; the first time without his co-driver sitting beside him, the first time racing wheel to wheel and not the clock, and first place for the series and adding another championship to his tally. With his new Polaris RZR XP Turbo at hand, Cody will again face probably his biggest challenge and fight off the newcomers to become victorious!

Cody's score board; Three-times Australian Rally Champion (2003, 2004, 2005), Four-times Asia-Pacific Rally Champion (2006, 2007, 2008, 2009), Four-times winner Australian SXS Challenge (2012, 2013, 2014, 2015), Inaugural winner SXS Australian Championship (2016)

[f / Codyrally](#)



»» **SHANE JACOBSON** ACTOR / POLARIS AMBASSADOR

Award Winning actor and motoring enthusiast Shane Jacobson has been a long-time friend of Polaris and Indian motorcycles. His easy banter and friendly demeanor has endeared him to fellow Aussies.

When Polaris made history to bring four-wheel racing onto the Motocross tracks of Australia, Shane was there driving a race prepared Polaris RZR XP 1000 in wheel to wheel battles and giving no quarter. And the smile on his face was no act. No matter if behind the wheel racing a Polaris or behind the handlebars of his Polaris ATV on his farm, Shane is a Polaris guy through and through.

[f / shane-jacobson](#)
www.shanejacobson.com.au



»» **MARK LARKHAM** RACING DRIVER / TV COMMENTATOR / POLARIS AMBASSADOR

Mark Larkham is best known for his insightful analysis of V8 Supercars strategy and what goes on in the pits. His expertise is a vital component of the Network Ten coverage of the pinnacle of Australian Motorsport, and adds a depth to an otherwise two dimensional experience.

And when not in front of the camera, he is working on his commercial cattle farm in SE Queensland. It is here that Mark puts his Polaris off-road vehicles through real world testing and evaluation. Get on line to check out what Mark has discovered about Polaris and how they stack up.



»» **JASE ANDREWS / SIMON ANDERSON** ALL 4 ADVENTURE TV / POLARIS AMBASSADORS

The Channel 10 hit series All 4 Adventure has a massive following with fans always eager to see where Jase Andrews takes us on an adventure next, along with his good mate, Simon Anderson. The show is now in season 9. For many years of their journey Polaris has been a vital tool in their arsenal more often than not getting the boys and their big rigs out of trouble and extending their reach into places rarely, if ever seen.

Die-hard fans of Polaris, Jase and Simon know their vehicles have to stand the torture of the outback and get everyone home again safely.

[f / All4Adventure](#)
www.all4adventure.com




JASE ANDREWS (All 4 Adventure)
& **SIMON EVANS** (Rally Champion)




POLARIS RACING





POLARIS RZR AUSTRALIAN CHAMPIONSHIP
2016 CHAMPION
Team: EMAC Electrical Services
Driver: Ewan McIue
RZR: RZR XP 1000



SXS AUSTRALIAN CHAMPIONSHIP
2016 CHAMPION
Team: Polaris Racing
Driver: Cody Crocker
RZR: RZR XP Turbo



MATTY MINGAY
(Hot Wheels Stuntman & Polaris Ambassador)



**CUSTOMISE.
OPTIMISE.
CHOOSE.**

LOCK & RIDE



POLARIS PRO-FIT CAB ADVANTAGE

Welcome to the new standard in accessory integration, quality and fit and finish with the industry-exclusive Pro-Fit cab system. The highly modular cab system offers cab options from robust canvas doors featuring a poly windshield to premium automotive glass tip-out windshields and power window molded doors. Even better, the purpose built chassis features dedicated component attachment points to allow for extremely efficient cab installation or removal.


LOCK & RIDE




**REVOLUTIONARY
INSTALLATION**

Polaris Lock & Ride accessories are designed to be installed directly into designated mounting points and lock securely in place providing easy installation or removal with a sealed fit.

With Polaris Lock & Ride, accessories can be fitted in as fast as 30 seconds.




With a Polaris Lock & Ride Cab interior noise levels are reduced by 60% at idle and 40% at 32kph



Other Cabs | Lock & Ride® Pro-Fit

Lock & Ride windshields and rear panels offer more visibility by eliminating exterior framework so riders enjoy a full, uncompromised field of vision.



Gaskets run the perimeter of the doors, rear panels and windshields offering reliable protection and comfort from the elements.

THE POLARIS ENGINEERED ACCESSORIES RANGE




CARGOMAX SYSTEM



POLARIS HD WINCHES



CARGO BED ENCLOSURE SYSTEM

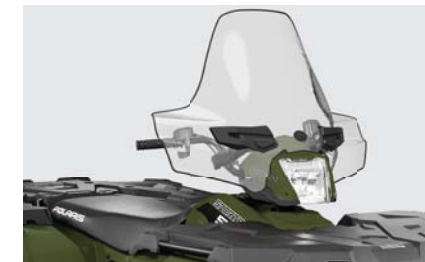

WINDSHIELDS



TOOL RACK



REAR BRUSHGUARD, RACK EXTENDER



GUN BOOT MOUNT



FRONT BRUSHGUARD, LIGHT BAR, SIDE RAILS

» FIND OUT MORE..

To find out more ask your closest Polaris Dealer for a Polaris Engineered Parts, Accessories and Apparel Brochure or visit www.polarisindustries.com.au



**DEPLOYABILITY.
OFF-ROAD MOBILITY.
VERSATILITY.**

DAGOR

The Polaris DAGOR, short for Deployable Advanced Ground Off-Road combat vehicle, was developed to meet a need for a combat-utility vehicle, light enough to be sling-loaded into battle from a UH-60 Black Hawk helicopter. The DAGOR is an Ultra-Light Combat Vehicle designed to equip combat teams with go-anywhere vehicles capable of carrying a nine-man squad.

With Trophy Truck inspired suspension the DAGOR provides world class off-road mobility, agility and smooth high speed performance all while carrying a full military grade payload.

A Turbo Diesel/JP8 Engine takes the DAGOR wherever it needs to go with the added benefit of being able to use two fuel types being Diesel or JP8 Jet Fuel. The DAGOR is heavy weapons capable and can accommodate up to a 48 inch weapons ring.

MRZR 2 / MRZR 4 / MRZR D4

Polaris Defence MRZR's are ultra-light tactical vehicles. Available in 2 and 4 seat configurations with additional support for 1-2 rearward facing seats combined with a modular cargo system, the Polaris MRZR line up can carry up to 6 passengers with gear.

MRZR 2 & MRZR 4 models boast proven Polaris Prostar engines. The all-new MRZR D4 features a Turbo Diesel engine which extends range along with increased auxiliary power.

MRZR vehicles feature a tool-less collapsing roll cage allowing them to be quickly and easily internally air transportable in a multitude of aircraft. Combined with blackout drive and infrared capability for stealth operation the Polaris MRZR line up are built for today's operator.

Note: Polaris Defence models are not for public sale





POLARIS GENERATORS

WHY BUY A POLARIS POWER™ GENERATOR?

Polaris POWER™ portable digital inverter generators are built for your recreational lifestyle and are tested to the same rigorous standards as every Polaris® product. Our P1000i, P2000i and P3000iE models are all easy to use and provide hours of clean inverted power, which means they deliver a consistent, stable level of voltage — anytime, anywhere.

PRODUCT HIGHLIGHTS

P1000i & P2000i

- P1000i Max AC Output: 1000W
- P2000i Max AC Output: 2000W
- Lightweight
- 10+ Hours Run-time
- Parallel Capable
- Two Ergonomically Friendly Handles

P3000iE

- Max AC Output: 3000W
- 21+ Hours Run-time
- Electric Start
- Locking Wheels and Rugged Handles



FEATURES & BENEFITS

- + HIGHLY PORTABLE
- + QUIET
- + FUEL-EFFICIENT
- + COMPACT
- + 3 YEAR LIMITED
- + LIGHTWEIGHT WARRANTY

See full warranty details at polarispower.com.au

YOUTH

POLARIS YOUTH SPECIFICATIONS



	Outlaw 50	Outlaw 110	Sportsman 110	ACE 150	RZR 170	
ENGINE	Engine Type	4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke Single Cylinder	
	Displacement	49cc	112cc	112cc	149cc	169cc
	Fuel System	Carbureted	EFI	EFI	EFI	EFI
	Cooling	Air	Air	Air	Fan	Fan
DRIVE TRAIN	Transmission / Final Drive	Automatic PVT Forward; Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain	
	Drive System	2WD	2WD	2WD	2WD	2WD
	Engine Braking System / Active Descent Control	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped
SUSPENSION	Front Suspension	Single A-Arm with 7.6 cm Travel	Single A-Arm with 12.7 cm Travel	Single A-Arm with 12.7 cm Travel	Dual A-Arm 13 cm Travel	Single A-Arm 12.7 cm Travel
	Rear Suspension	Mono-Shock Swingarm with 7.6 cm Travel	Mono-Shock Swingarm with 15.2 cm Travel	Mono-Shock Swingarm with 15.2 cm Travel	Swingarm Dual Shocks with 15.2 cm Travel	Swingarm Dual Shocks with 12.7 cm Travel
BRAKES	Front / Rear Brakes	4-Wheel Drum	4-Wheel Drum	4-Wheel Drum	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc
	Parking Brake	Lockable Hand Lever	Lockable Hand Lever	Lockable Hand Lever	Hand-Actuated	Hand-Actuated
TYRES AND WHEELS	Front Tyres	16 x 6.5-7 Duro	19 x 7-8 Duro	19 x 7-8 Duro	22 x 7-10 Wanda	19 x 7-8 Duro
	Rear Tyres	16 x 8-7 Duro	18 x 9.5-8 Duro	18 x 9.5-8 Duro	22 x 10-10 Wanda	20 x 10-9 Duro
	Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
DIMENSIONS / CAPACITIES	Wheelbase	83.8 cm	105.4 cm	105.4 cm	165.1 cm	165.1 cm
	Dry Weight	95.3 kg	126 kg	133 kg	260 kg	224 kg
	Overall Vehicle Size (L x W x H)	121.9 x 80 x 71.1 cm	155.6 x 93.3 x 97.8 cm	156.8 x 93.3 x 97.8 cm	215.9 x 121.9 x 147.3 cm	215.9 x 121.9 x 139.7 cm
	Ground Clearance	10.2 cm	10.2 cm	10.2 cm	22.9 cm	15.2 cm
	Seat Height	58.4 cm	68.6 cm	68.6 cm	N.A.	N.A.
	Fuel Capacity	4.5 L	5.9 L	7.8 L	9.5 L	9.5 L
	Front / Rear Rack or Box Capacity	N.A.	N.A.	6.8 kg/13.6 kg	N.A./22.7 kg	N.A.
	Payload Capacity	N.A.	N.A.	N.A.	N.A.	N.A.
FEATURES	Hitch / Type	N.A.	N.A.	N.A.	N.A.	N.A.
	Lighting	Dual Front Running Lights; Single Rear Brakelight/Tailight	Dual Front Running Lights; Single Rear Brakelight/Tailight	Dual Front Running Lights; Single Rear Brakelight/Tailight	Dual Front LED Running Lights; Single Rear Brakelight/Tailight; F/N/R Light	Dual Front Running Lights; Single Rear Brakelight/Tailight
	Electronic Power Steering	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped
	Instrumentation	N.A.	N/R Light	N/R Light	N/R Light	N/R Light
	Colours	Pink Power and Lime Squeeze	Pink Power and Lime Squeeze	Velocity Blue	Indy Red	Voodoo Blue

POLARIS ACE

POLARIS ACE SPECIFICATIONS



	ACE 500	ACE 570 HD EPS	ACE 900 XC EPS	
ENGINE	Engine Type	4-Stroke SOHC Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Twin Cylinder
	Displacement	500cc	567cc	875cc
	Fuel System	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
	Cooling	Liquid	Liquid	Liquid
DRIVE TRAIN	Transmission / Final Drive	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
	Drive System	True On-Demand AWD/2WD	True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD
	Engine Braking System / Active Descent Control	Not Equipped/Not Equipped	Standard/Standard	Not Equipped/Not Equipped
SUSPENSION	Front Suspension	MacPherson Strut with stabilizer bar, 20.8 cm Travel	MacPherson Strut with stabilizer bar, 20.8 cm Travel	Long Travel Dual A-Arm with stabilizer bar, Walker Evans Clicker Needle Shocks, 31.2 cm Travel
	Rear Suspension	Dual A-Arm with stabilizer bar, IRS 24.1 cm Travel	Dual A-Arm with stabilizer bar, IRS 24.1 cm Travel	Long Travel Dual A-Arm with stabilizer bar, Walker Evans Clicker Needle Shocks, 32 cm Travel
BRAKES	Front / Rear Brakes	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc
	Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission
TYRES AND WHEELS	Front Tyres	24 x 8-12; NS388	25 x 8-12; Carlisle	27 x 9-12; GBC Dirt Commander
	Rear Tyres	24 x 10-12; NS388	25 x 10-12; Carlisle	27 x 11-12; GBC Dirt Commander
	Wheels	Stamped Steel	Stamped Steel	Cast Aluminum
DIMENSIONS / CAPACITIES	Wheelbase	156.2 cm	156.2 cm	171.5 cm
	Dry Weight	384 kg	388 kg	489 kg
	Overall Vehicle Size (L x W x H)	229 cm x 122 cm x 171 cm	229 cm x 122 cm x 173 cm	238 cm x 150 cm x 183 cm
	Ground Clearance	26 cm	26 cm	33 cm
	Seat Height	65 cm	66 cm	73 cm
	Fuel Capacity	19.9 L	19.9 L	19.9 L
	Bed Box Dimensions (L x W x H)	43 cm x 89 cm x 10 cm	43 cm x 89 cm x 10 cm	43 cm x 89 cm x 10 cm
	Front/Rear Rack or Box Capacity	55 kg / 110 kg	55 kg / 110 kg	55 kg / 110 kg
FEATURES	Payload Capacity	261 kg	261 kg	261 kg
	Hitch Towing Rating	680.4 kg	680.4 kg	Not Recommended
	Hitch / Type	Standard/1.25" Receiver	Standard/1.25" Receiver	Accy
	Cargo System	Lock & Ride, 11 L Front Dry Storage, Dual Dash Trays	Lock & Ride, 11 L Front Dry Storage, Dual Dash Trays	Lock & Ride, 11 L Front Dry Storage, Dual Dash Trays
	Lighting	Dual 50w Bumper Lights, Dual Brakelights/Tailights	Dual 50w Bumper Lights, Dual Brakelights/Tailights	Dual 50w Bumper Lights, Dual LED Brakelights/Tailights
Other Standard Features	Electronic Power Steering	Not Equipped	Standard	Standard
	Instrumentation	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour meter, Gear Indicator, Fuel Gauge, AWD Indicator, Volt Meter, Coolant Temp, Hi Temp Light, Clock, DC Outlet	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour meter, Gear Indicator, Fuel Gauge, AWD Indicator, Volt Meter, Coolant Temp, Hi Temp Light, Clock, DC Outlet	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour meter, Gear Indicator, Fuel Gauge, AWD Indicator, Volt Meter, Coolant Temp, Hi-Temp Light, Clock, Bluetooth Connectivity, Missed Call, Missed Text, Cell Signal Strength, Cell Battery Strength, DC Outlet
	Other Standard Features		Driveshaft Spline Seals, Sealed Ball Joints, Sealed Suspension Bushings	1/4 Doors, Performance Steering Wheel
Colours	Indy Red	Velocity Blue	Matte Silver Pearl (Paint)	



	Farmhand 450 HD	Sportsman 450	Sportsman 450 EPS	Sportsman 570 HD	Sportsman 570 EPS
ENGINE	Engine Type	4-Stroke SOHC Single Cylinder	4-Stroke SOHC Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Single Cylinder
	Displacement	500cc	500cc	500cc	567cc
	Fuel System	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
DRIVE TRAIN	Cooling	Liquid	Liquid	Liquid	Liquid
	Transmission/Final Drive	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
	Drive System	2WD	True On-Demand AWD/2WD	True On-Demand AWD/2WD	True On-Demand AWD/2WD
SUSPENSION	Engine Braking System / Active Descent Control	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Standard/Not Equipped
	Front Suspension	MacPherson Strut, 20.8 cm Travel	MacPherson Strut, 20.8 cm Travel	MacPherson Strut, 20.8 cm Travel	MacPherson Strut, 20.8 cm Travel
	Rear Suspension	Dual A-Arm, 24.1 cm Travel	Dual A-Arm, 24.1 cm Travel	Dual A-Arm, IRS 24.1 cm Travel	Dual A-Arm, IRS 24.1 cm Travel
BRAKES	Front / Rear Brakes	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake
	Parking Brake	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever
TYRES AND WHEELS	Front Tyres	24 x 8-12; NS388	24 x 8-12; NS388	24 x 8-12; NS388	25 x 8-12; 489
	Rear Tyres	24 x 10-12; NS388	24 x 10-12; NS388	24 x 10-12; NS388	25 x 10-12; 489
	Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
DIMENSIONS / CAPACITIES	Wheelbase	128.3 cm	128.3 cm	128.3 cm	128.3 cm
	Dry Weight	318 kg	318 kg	323 kg	330 kg
	Overall Vehicle Size (L x W x H)	210.8 x 121.9 x 119.4 cm	210.8 x 121.9 x 119.4 cm	210.8 x 121.9 x 119.4 cm	210.8 x 121.9 x 121.9 cm
	Ground Clearance	26.6 cm	26.6 cm	26.6 cm	27.9 cm
	Seat Height	84.5 cm	84.5 cm	84.5 cm	85.7 cm
	Fuel Capacity	17 L	17 L	17 L	17 L
	Rear Box Dimensions (L x W x H)	N.A.	N.A.	N.A.	N.A.
	Front/Rear Rack or Box Capacity	40.8 kg / 81.6 kg	40.8 kg / 81.6 kg	40.8 kg / 81.6 kg	40.8 kg / 81.6 kg
	Payload Capacity	220 kg	220 kg	220 kg	220 kg
	Hitch Towing Rating	555.7 kg	555.7 kg	555.7 kg	555.7 kg
FEATURES	Hitch / Type	Standard/1.25" Receiver	Standard/1.25" Receiver	Standard/1.25" Receiver	Standard/1.25" Receiver
	Cargo System	Lock & Ride, 23 L Front Dry Storage, 8 L Rear Storage	Lock & Ride, 23 L Front Dry Storage, 8 L Rear Storage	Lock & Ride, 23 L Front Dry Storage, 8 L Rear Storage	Lock & Ride, 23 L Front Dry Storage, 8 L Rear Storage
	Lighting	50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights	50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights	50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights	50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights
	Electronic Power Steering	Not Equipped	Not Equipped	Standard	Not Equipped
	Instrumentation	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet
	Other Standard Features	Driveshaft Spline Seals, Sealed Ball Joints, Sealed Suspension Bushings			Driveshaft Spline Seals, Sealed Ball Joints, Sealed Suspension Bushings
	Colours	Velocity Blue	Velocity Blue	Sage Green	Indy Red
					Polaris Pursuit Camo



	Sportsman 570 EPS Utility Edition	UTE 570 HD EPS	Sportsman 6x6 570 EPS	Sportsman 850 SP EPS	Sportsman XP 1000 EPS	Scrambler XP 1000 EPS
ENGINE	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke SOHC Twin Cylinder	4-Stroke SOHC Twin Cylinder	4-Stroke SOHC Twin Cylinder
	567cc	567cc	567cc	850cc	952cc	952cc
	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injected	Electronic Fuel Injected	Electronic Fuel Injected
DRIVE TRAIN	Cooling	Liquid	Liquid	Liquid	Liquid	Liquid
	Transmission/Final Drive	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
	Drive System	True On-Demand AWD/2WD	On-Demand True AWD/2WD	High Performance True On-Demand GWD/4WD	High Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD
SUSPENSION	Engine Braking System / Active Descent Control	Standard/Not Equipped	Standard/Standard	Standard/Standard	Standard/Standard	Not Equipped/Not Equipped
	Front Suspension	MacPherson Strut, 20.8 cm Travel	MacPherson Strut, 20.8cm Travel	MacPherson Strut, 20.8 cm Travel	Dual A-Arm 22.9 cm Travel	Hi Clearance Arched Dual A-Arm 22.9 cm Travel
	Rear Suspension	Dual A-Arm, 24.1 cm Travel	Dual A-Arm, IRS 24.1cm Travel	Dual A-Arm, IRS, 24.1 cm Travel	Dual A-Arm, Rolled IRS, 26 cm Travel	Hi Clearance Arched Dual A-Arm, Rolled IRS, 26 cm Travel
BRAKES	Front / Rear Brakes	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 3-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake
	Parking Brake	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever	Park in Transmission/Lockable Hand Lever
TYRES AND WHEELS	Front Tyres	25 x 8-12; 489	25 x 8-12; 489	26 x 8-12 PXT	26 x 8-14; CST	26 x 8-14; 489 II
	Rear Tyres	25 x 10-12; 489	25 x 10-12; 489	26 x 10-12 PXT	26 x 10-14; CST	26 x 10-14; 489 II
	Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Cast Aluminum	Cast Aluminum
DIMENSIONS / CAPACITIES	Wheelbase	128.3 cm	142.2cm	213.4 cm	134.6 cm	134.6 cm
	Dry Weight	343 kg	352kg	489 kg	359 kg	366 kg
	Overall Vehicle Size (L x W x H)	210.8 x 121.9 x 121.9 cm	218.4 x 121.9 x 121.9 cm	295 x 124.5 x 124.5 cm	211.4 x 120.9 x 128.9 cm	211.4 x 120.9 x 128.9 cm
	Ground Clearance	27.9 cm	27.9 cm	29.2 cm	29.2 cm	29.2 cm
	Seat Height	85.7 cm	85.7cm	94 cm	94 cm	89 cm
	Fuel Capacity	17 L	17 L	25.5 L	19.9 L	19.9 L
	Rear Box Dimensions (L x W x H)	N.A.	49.5 x 95 x 16.5 cm	96.5 x 99.1 x 20.3 cm	N.A.	N.A.
	Front/Rear Rack or Box Capacity	40.8 kg / 81.6 kg	40.8 / 180 kg	40.8 kg / 362.8 kg	55 kg / 110 kg	55 kg / 110 kg
	Payload Capacity	220 kg	319.7 kg	507 kg	261 kg	261 kg
	Hitch Towing Rating	555.7 kg	555.7 kg	680 kg	680.4 kg	680.4 kg
FEATURES	Hitch / Type	Standard/1.25" Receiver	Standard/1.25" Receiver	Standard/2" Receiver	Standard/1.25" Receiver	Standard/1.25" Receiver
	Cargo System	Lock & Ride, 23 L Front Dry Storage, 8 L Rear Storage	Lock & Ride, 23 L Front Dry Storage	23 L Front Dry Storage, Lock & Ride Dump Box Rails & Rear Racks, D-rings in Dump Box	Lock & Ride, 4 Cast Rack Extenders 15 L Front Dry Storage, 8 L Rear Storage	Lock & Ride, 6 Cast Rack Extenders 15 L Front Dry Storage, 8 L Rear Storage
	Lighting	50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights	Dual 50w Low Beam Bumper Lights, Single 50w High Beam Pod Light; Dual Brakelights/Taillights	Triple 50w High Beam, Dual 50w Low Beam Headlights; Dual Brakelights/Taillights	Triple 50w High Beam, Dual 50w Low Beam Headlights; Dual LED Brakelights/Taillights	Triple 50w High Beam, Dual 50w Low Beam Headlights; Dual LED Brakelights/Taillights
	Electronic Power Steering	Standard	Standard	Standard	Standard	Standard
	Instrumentation	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Analog Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour meter, Gear Indicator, Fuel Gauge, AWD Indicator, Low Battery, Hi-Temp Light, Clock, DC Outlet	Analog Speedometer, Digital Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Indicator, Diagnostic Indicator, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour Meter, Gear Indicator, Fuel Gauge, AWD Indicator, Volt Meter, Coolant Temp, Hi Temp Light, Clock, Bluetooth Connectivity, Missed Call, Missed Text, Cell Signal Strength, Cell Battery Strength, DC Outlet, 3 Mode Throttle Control	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour meter, Gear Indicator, Fuel Gauge, AWD Indicator, Volt Meter, Coolant Temp, Hi-Temp Light, Clock, Bluetooth Connectivity, Missed Call, Missed Text, Cell Signal Strength, Cell Battery Strength, DC Outlet, 3 Mode Throttle Control
	Other Standard Features	Variable Low Speed Limiter, Switchable Rear 12V DC Power, Work Specific Gearing, Steel Racks, Dual Rear Work Trays, Front Receiver Hitch, Steel Front Bumper	Driveshaft Spline Seals, Sealed Ball Joints, Sealed Suspension Bushings		Drink and Mobile Phone Holder	Drink and Mobile Phone Holder
	Colours	Maroon Metallic	Blue Fire	Sage Green	Polaris Pursuit Camo	Stealth Black (Paint)
						FOX Podium 2.0 Adjustable Shocks



	RANGER EV	RANGER 500	RANGER 570 HD EPS	RANGER 800 6x6	RANGER XP 900 EPS
ENGINE	Engine Type	Single 48-Volt, High-Efficiency, AC-Induction Motor	4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke Twin Cylinder
	Displacement	N.A.	500cc	567cc	760cc
	Fuel System / Battery	6 Acid	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
	Cooling	N.A.	Liquid	Liquid	Liquid
DRIVE TRAIN	Transmission/ Final Drive	Direct Drive With Low-Noise Gears	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft
	Drive System	True On-Demand AWD/2WD/ VersaTrac Turf Mode	True On-Demand AWD/2WD/ VersaTrac Turf Mode	True On-Demand AWD/2WD/ VersaTrac Turf Mode	True On-Demand 6WD/Rear 4WD/Mid Differential Lock
SUSPENSION	Engine Braking System / Active Descent Control	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Standard/Standard	Not Equipped/Not Equipped
	Front Suspension	MacPherson Strut 22.9 cm Travel	MacPherson Strut 22.9 cm Travel	MacPherson Strut 22.9 cm Travel	Dual A-Arm 24.4 cm Travel
BRAKES	Rear Suspension	Dual A-Arm, IRS 22.9 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 22.9 cm Travel
	Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers
TYRES AND WHEELS	Parking Brake	Hand-Actuated	Park In-Transmission	Park In-Transmission	Park In-Transmission
	Front Tyres	25 x 9-12; Carlisle	25 x 8-12; 489	25 x 8-12; 489	25 x 10-12; 489
	Rear Tyres	25 x 9-12; Carlisle	25 x 10-12; 489	25 x 10-12; 489	25 x 11-12; 489
	Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
DIMENSIONS / CAPACITIES	Wheelbase	182.9 cm	185.4 cm	185.4 cm	266.7 cm
	Dry Weight	783 kg	490 kg	499 kg	704 kg
	Overall Vehicle Size (L x W x H)	279 x 147 x 185 cm	279 x 147 x 185 cm	279 x 147 x 185 cm	348 x 152 x 193 cm
	Ground Clearance	25.4 cm	25.4 cm	25.4 cm	30.5 cm
	Seating Capacity	2	2	2	3
	Fuel Capacity	N.A.	34.1 L	34.1 L	34.1 L
	Bed Box Dimensions (L x W x H)	81 x 107 x 29 cm	81 x 107 x 29 cm	81 x 107 x 29 cm	108 x 137 x 29 cm
	Front/Rear Rack Box Capacity	226.8 kg	226.8 kg	226.8 kg	N.A. / 567 kg
	Payload Capacity	453.6 kg	453.6 kg	453.6 kg	907.2 kg
	Hitch Towing Rating	680.4 kg	680.4 kg	680.4 kg	907.2 kg
FEATURES	Hitch / Type	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver
	Cargo System/Cab	Lock & Ride	Lock & Ride	Lock & Ride	Lock & Ride
	Lighting	50W Headlight, LED Tail	50W Headlight, LED Tail	50W Headlight, LED Tail	55W low/ 60W high, LED Tail
	Electronic Power Steering	Not Equipped	Not Equipped	Standard	Not Equipped
	Adjustable Driver's Seat	Not Equipped	Not Equipped	Not Equipped	Standard
	Tilt Steering	Standard	Standard	Standard	Standard
	Instrumentation	Digital Hour Meter, Mode Indicator, DC Outlet, Hi-Temp Light, Change Cycle Indicator, Battery Life Indicator	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (1)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlets (2)
	Other Standard Features			Upgraded Rear Driveshaft, Grease Nipples, HD Sway Bar, Sealed Suspensions Bushings, Sealed Ball Joints, Driveshaft Spline Seals	
	Colours	Avalanche Gray	Solar Red	Solar Red	Avalanche Gray



	RANGER XP 1000 EPS	RANGER XP 1000 EPS - Hunter Edition	RANGER DIESEL 1000 HD EPS	RANGER CREW 570 EPS	RANGER CREW XP 1000 EPS	RANGER CREW DIESEL
ENGINE	4-Stroke Twin Cylinder	4-Stroke Twin Cylinder	3-Cylinder Diesel	4-Stroke Single Cylinder	4-Stroke Twin Cylinder	3-Cylinder Diesel
	999cc	999cc	1028cc	567cc	999cc	1028cc
	Electronic Fuel Injection	Electronic Fuel Injection	Mechanical Injection	Electronic Fuel Injection	Electronic Fuel Injection	Mechanical Injection
	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
DRIVE TRAIN	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft
	Pro-Lock On-Demand AWD/2WD/ VersaTrac Turf Mode with 3-Mode Throttle Control	Pro-Lock On-Demand AWD/2WD/ VersaTrac Turf Mode with 3-Mode Throttle Control	True On-Demand AWD/2WD/ VersaTrac Turf Mode	True On-Demand AWD/2WD/ VersaTrac Turf Mode	Pro-Lock On-Demand AWD/2WD/ VersaTrac Turf Mode with 3-Mode Throttle Control	True On-Demand AWD/2WD/ VersaTrac Turf Mode
SUSPENSION	Not Equipped/Not Equipped	Standard/Standard	Standard/Standard	Not Equipped/Not Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped
	Dual A-Arm 25.4 cm Travel	Dual A-Arm 25.4 cm Travel	Dual A-Arm 25.4 cm Travel	MacPherson Strut 22.9 cm Travel	Dual A-Arm 25.4 cm Travel	Dual A-Arm 25.4 cm Travel
BRAKES	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel
	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers
TYRES AND WHEELS	Park In-Transmission	Park In-Transmission	Park In-Transmission	Park In-Transmission	Park In-Transmission	Park In-Transmission
	26 x 9-12; PXT	26 x 9-12; PXT	26 x 9-12; PXT	25 x 10-12; 489	26 x 9-12; PXT	26 x 9-12; PXT
	26 x 11-12; PXT	26 x 11-12; PXT	25 x 11-12; 489	25 x 10-12; 489	26 x 11-12; PXT	26 x 11-12; PXT
	Cast Aluminum	Stamped Steel	Stamped Steel	Cast Aluminum	Cast Aluminum	Stamped Steel
DIMENSIONS / CAPACITIES	206 cm	206 cm	206 cm	266.7 cm	287 cm	287 cm
	598 kg	652.7 kg	649 kg	613 kg	712.6 kg	767 kg
	296 x 152 x 193 cm	296 x 152 x 193 cm	296 x 152 x 193 cm	361 x 152 x 185 cm	377 x 155 x 193 cm	377 x 155 x 193 cm
	30.5 cm	30.5 cm	30.5 cm	25.4 cm	28.7 cm	28.7 cm
	3	3	3	4	6	6
	37.9 L	37.9 L	37.9 L	34.1 L	37.9 L	37.9 L
	93 x 137 x 29 cm	93 x 137 x 29 cm	93 x 137 x 29 cm	81 x 107 x 29 cm	93 x 137 x 29 cm	93 x 137 x 29 cm
	N.A. / 453.6 kg	N.A. / 453.6 kg	N.A. / 453.6 kg	226.8 kg	N.A. / 453.6 kg	N.A. / 453.6 kg
	680.4 kg	680.4 kg	680.4 kg	567 kg	793.8 kg	793.8 kg
	907.2 kg	907.2 kg	907.2 kg	680.4 kg	907.2 kg	907.2 kg
FEATURES	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver	Standard/2" Receiver
	Lock & Ride	Lock & Ride	Lock & Ride	Lock & Ride	Lock & Ride	Lock & Ride
	55W low/ 60W high, LED Tail	55W low/ 60W high, LED Tail	55W low/ 60W high, LED Tail	50W Headlight, LED Tail	55W low/ 60W high, LED Tail	55W low/ 60W high, LED Tail
	Standard	Standard	Standard	Standard	Standard	Not Equipped
	Standard	Standard	Not Equipped	Not Equipped	Standard	Not Equipped
	Standard	Standard	Standard	Standard	Standard	Standard
	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (1)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (1)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, DC Outlets (2)
			Upgraded Rear Driveshaft, Grease Nipples, HD Sway Bar, Sealed Suspensions Bushings, Sealed Ball Joints, Driveshaft Spline Seals			
	Nara Bronze	Polaris Pursuit Camo	Sage Green	Titanium Metallic	Nara Bronze	Sage Green



GENERAL 1000 EPS Premium



GENERAL 1000 EPS Deluxe



GENERAL 4 1000 EPS

	GENERAL 1000 EPS Premium	GENERAL 1000 EPS Deluxe	GENERAL 4 1000 EPS
ENGINE	Engine Type	4-Stroke Twin Cylinder	4-Stroke Twin Cylinder
	Displacement	999cc	999cc
	Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection
DRIVE TRAIN	Cooling	Liquid	Liquid
	Transmission / Final Drive	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
	Drive System	True On-Demand AWD/2WD/ VersaTrac Turf Mode	True On-Demand AWD/2WD/ VersaTrac Turf Mode
SUSPENSION	Engine Braking System / Active Descent Control	Standard/Not Equipped	Standard/Not Equipped
	Front Suspension	Dual A-Arm 31.1 cm Travel	Dual A-Arm 31.1 cm Travel
BRAKES	Rear Suspension	Dual A-Arm, IRS 33.5 cm Travel	Dual A-Arm, IRS 33.5 cm Travel
	Front / Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers
TYRES AND WHEELS	Parking Brake	Park In-Transmission	Park In-Transmission
	Front Tyres	27 x 9-14; Maxxis Coronado	27 x 9-14; Maxxis Coronado
DIMENSIONS / CAPACITIES	Rear Tyres	27 x 11-14; Maxxis Coronado	27 x 11-14; Maxxis Coronado
	Wheels	Cast Aluminum	Cast Aluminum
	Wheelbase	206 cm	206 cm
	Dry Weight	676 kg	700 kg
	Overall Vehicle Size (L x W x H)	300 x 158.7 x 187 cm	300 x 158.7 x 190.5 cm
	Ground Clearance	30.5 cm	30.5 cm
	Seating Capacity	2	2
	Fuel Capacity	35.9 L	35.9 L
	Bed Box Dimensions (L x W x H)	69.8 x 109 x 29.5 cm	69.8 x 109 x 29.5 cm
	Box Capacity	272.2 kg	272.2 kg
FEATURES	Payload Capacity	499 kg	499 kg
	Hitch Towing Rating	680.4 kg	680.4 kg
	Hitch / Type	Standard/2" Receiver	Standard/2" Receiver
	Cargo System	Lock & Ride	Lock & Ride
	Lighting	55W low/ 60W high, LED Tail	55W low/ 60W high, LED Tail
	Electronic Power Steering	Standard	Standard
	Adjustable Driver's Seat	Standard	Standard
Instrumentation	Tilt Steering	Standard	Standard
	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, User selectable Blue/Red backlighting, Gear Indicator, DC Outlet	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, User selectable Blue/Red backlighting, Gear Indicator, DC Outlet	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, Coolant Temperature, Voltmeter, Service Indicator, Seat Belt Reminder, User selectable Blue/Red backlighting, Gear Indicator, DC Outlet
Colours	White Lightning	Matte Titanium	Silver Pearl



RZR S 570 EPS



RZR S 900 EPS



RZR XP Turbo EPS



RZR XP 4 Turbo EPS

	RZR S 570 EPS	RZR S 900 EPS	RZR XP Turbo EPS	RZR XP 4 Turbo EPS
ENGINE	Engine Type	ProStar 570; 4-Stroke DOHC Single Cylinder	ProStar 900; 4-Stroke DOHC Twin Cylinder	ProStar Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged
	HP / Displacement	45 hp / 567 cc	75 hp / 875 cc	168 hp / 925 cc
	Fuel System / Cooling	Electronic Fuel Injection / Liquid	Electronic Fuel Injection / Liquid	Electronic Fuel Injection / Liquid
DRIVE TRAIN	Transmission / Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
	Drive System	High Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD
	Engine Braking System	Not equipped	Standard	Not Equipped
SUSPENSION	Front Suspension	Dual A-Arm with 30.5 cm Travel	Dual A-Arm with 31.1 cm Travel	Dual A-Arm with Stabilizer Bar and 40.6 cm Travel
	Front Shocks	ZF Sachs Twin Tube	2" Walker Evans Needle	2.5" FOX Podium Internal Bypass Shocks with 24-Position Adj. Clickers
	Rear Suspension	Dual A-Arm with Stabilizer Bar and 31.75 cm Travel	Dual A-Arm with Stabilizer Bar and 33.5 cm Travel	Trailing Arm with Stabilizer Bar and 45.7 cm Travel
BRAKES	Rear Shocks	ZF Sachs Twin Tube	2" Walker Evans Needle	3" FOX Podium Internal Bypass Shocks with 24-Position Adjustable Clickers (Remote Reservoir)
	Front / Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Triple-Bore Front & Dual-Bore Rear Calipers
TYRES AND WHEELS	Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission
	Front Tyres	27 x 9-12; Maxxis Bighorn	27 x 9-12; GBC Dirt Commander	29 x 9-14 Maxxis Bighorn
DIMENSIONS / CAPACITIES	Rear Tyres	27 x 12-12; Maxxis Bighorn	27 x 11-12; GBC Dirt Commander	29 x 11-14 Maxxis Bighorn
	Wheels	Cast Aluminum	Cast Aluminum	Cast Aluminum
	Wheelbase	205.7 cm	200.7 cm	228.6 cm
	Dry Weight	513 kg	558 kg	679 kg
	Overall Vehicle Size (L x W x H)	273 x 152.4 x 177.3 cm	269.2 x 152.4 x 181.6 cm	302.2 x 162.6 x 187.3 cm
	Ground Clearance	30.5 cm	31.8 cm	13.5"
	Fuel Capacity	27.4 L	36 L	36 L
	Bed Box Dimensions (L x W x H)	51 x 102 x 23 cm	52.5 x 94 x 20 cm	72 x 57 x 17.8 cm
	Rear Box Capacity	136.1 kg	136.1 kg	136.1 kg
	Payload Capacity	335.6 kg	335.6 kg	408.2 kg
FEATURES	Hitch Towing Rating	680.4 kg	680.4 kg	N.A.
	Hitch / Type	Standard/1.25" Receiver	Standard/1.25" Receiver	Not Equipped
	Cargo System	Lock & Ride	Lock & Ride	Lock & Ride
	Lighting	Halogen, 55W low/ 60W high	Halogen, 55W Low/ 60W High & Red LED Tail / Brake Lights	White LED, Low/High & Red LED Tail / Brake Lights
	Ingress / Egress	Side Nets	Bowed 1/4 Doors	Bowed 1/4 Doors
	Seats / Seat Belts / Adjustability	Base Seats	Bolstered Bucket Seats	Bolstered Bucket Seats with Front Seat Sliders and Height Adjustable Seat Belts
	Electronic Power Steering	Standard	Standard	Standard
Instrumentation	Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, DC Outlet	Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, DC Outlet	New Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, DC Outlet	New Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, 2 DC Outlets (Front & Rear)
	Colours	Indy Red	Black Pearl	Cruiser Black